


FO-55111-A

HONEYWELL  
PART NUMBER  
313SX4-T  
PRODUCT CODE  
VDT0060

REV	DOCUMENT	CHANGED BY	CHECK
13	0060324	VKR 13JAN10	CMH

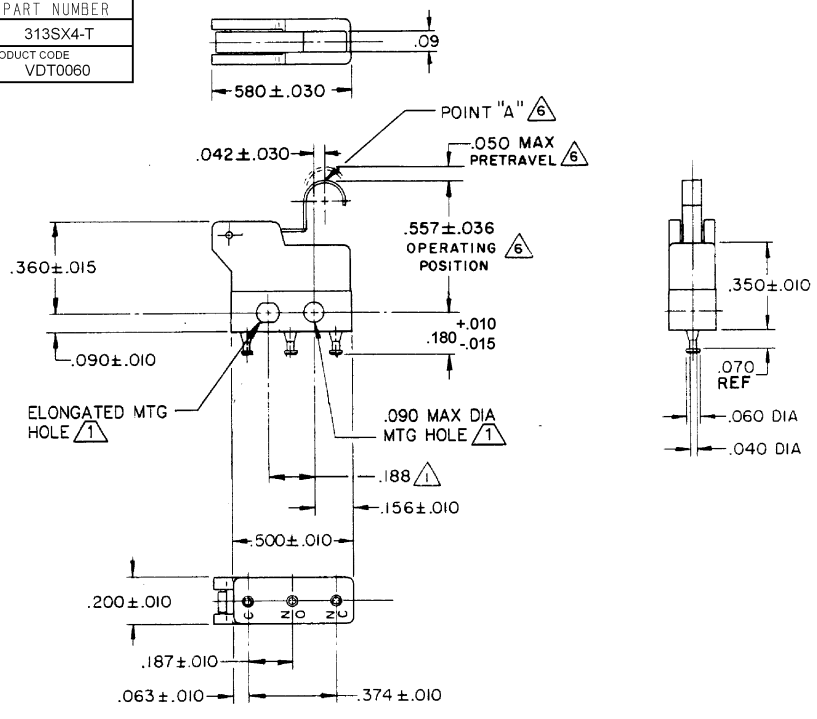

- NOTES
- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF  $.087$  MAX DIA ON  $.188 \pm .002$  CENTERS
  - TERMINALS ARE SOLDER DIPPED WITH ROHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
  - SWITCH WILL WITHSTAND TEMPERATURE OF  $250^{\circ}$  F
  - MOVABLE CONTACT MATERIAL -  $24$  K SOLID GOLD OVERLAY
  - STATIONARY CONTACT MATERIAL - GOLD ALLOY
  - CHARACTERISTICS ARE TAKEN AT POINT "A"

RELEASE NO. PR-2588  
REPLACES

CHARACTERISTICS
OPERATING FORCE..... 60 GRAMS MAX
RELEASE FORCE..... 11 GRAMS MIN
DIFFERENTIAL TRAVEL.... .015 MAX
OVERTRAVEL..... .010 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	0.5 AMP 0.5 AMP
RESISTIVE	1 AMP 1 AMP
MAXIMUM INRUSH 2 AMP	
KEMA CE	1A 250 V - T125 25E3
UL CSA	1A 125 VAC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	SPK	27FEB08
CHECK	RJ	27FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	313SX4-T	13
SCALE	-	WEIGHT: .003 LB MAX	SHEET 1 OF 1

4

3

2

1