


ALL DIMS. AND TOLS. PER ANSI Y14.5	DRAWN NAME	DATE	C&K PART NUMBER	C&K REV.
	SCALE	APPR.	11TL602	A
TOLERANCES		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		
DECIMAL	ANGLE	THIS DOCUMENT AND THE INFORMATION IN IT IS THE EXCLUSIVE PROPERTY OF C&K COMPONENTS, INC., AND IS NOT TO BE USED OR DISCLOSED WITHOUT THE EXPRESS WRITTEN PERMISSION OF C&K COMPONENTS, INC.		
.XX±	.XXX± ±			
<input checked="" type="checkbox"/> CRITICAL - MUST COMPLY WITH C&K QUALIFICATION STD. CKQI0019 <input type="checkbox"/> MAJOR DIMENSION		CUSTOMER NAME	PLATE NO.	
		C&K COMP.		
		CUSTOMER PART NUMBER	CUST. REV.	
		11TL602	NP	

NOTES:

1. STAMP SWITCH PER C&K/UNIMAX SPEC 7.18.3 (G6).
2. ASSEMBLE PER ROUTER AND BILL OF MATERIAL.
3. BASIC SWITCH IS TYPE 3TM.
4. UNIT PART NO. APPEAR ON BRACKET PER 34-415.
5. RIVETING TO BE DONE ON BRACKET SIDE AND TO BE FLUSH OR BELOW SURFACE OF BRACKET.
6. PLUNGER TO BE SPRAYED WITH DRY LUBE BEFORE (A) ASSEMBLING WITH BRACKET.

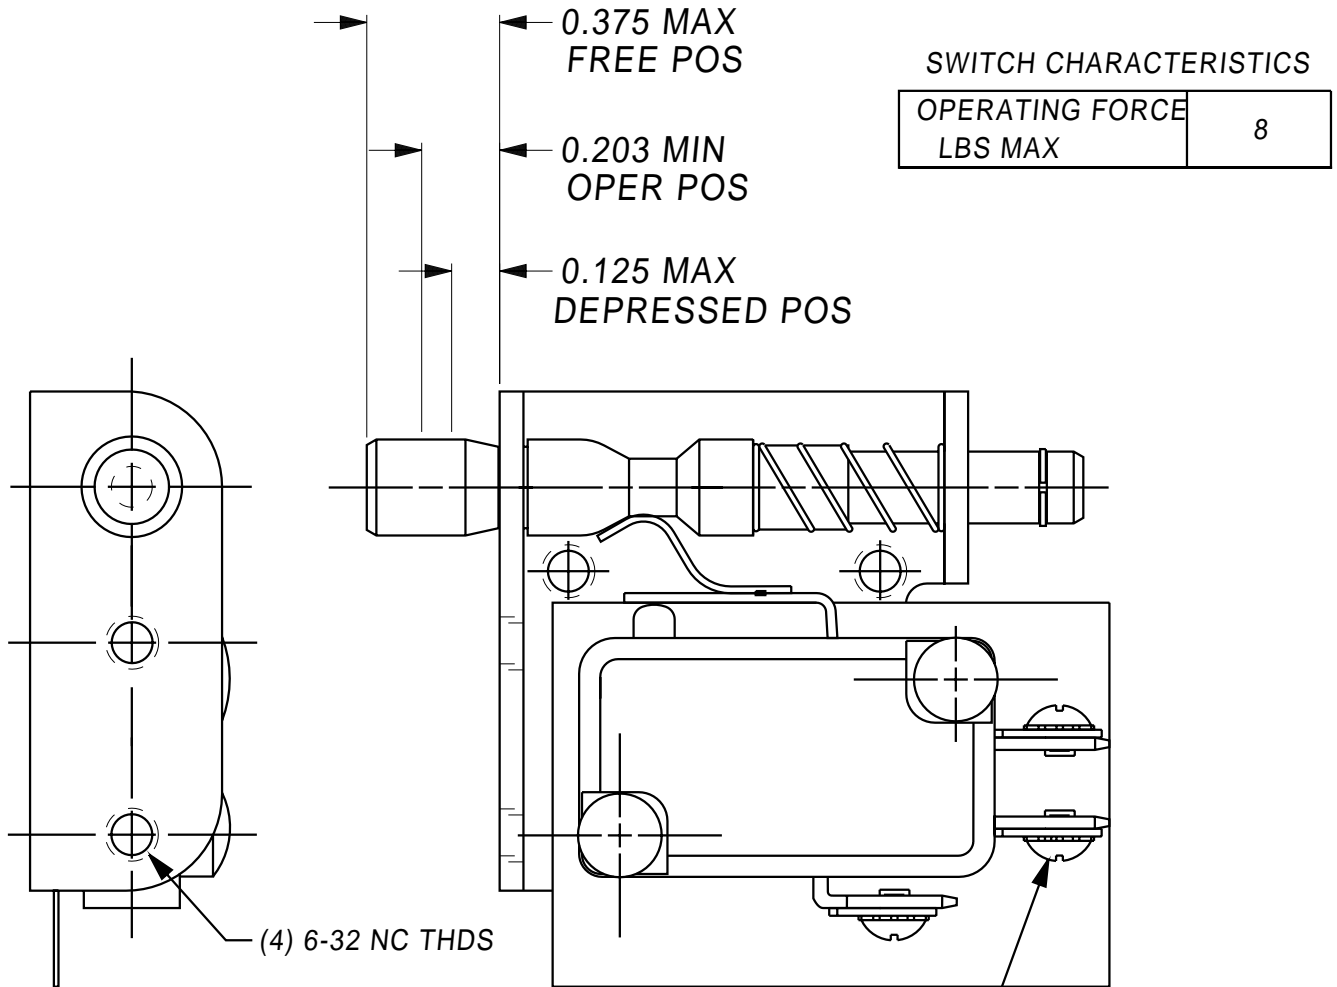

ECN	SYM	DESCRIPTION	DATE
9828	A	RELEASE TO PRODUCTION	2/9/01 CAB

INTERNAL DOCUMENT ONLY DISCARD PREVIOUS FORM
CAD FILE NO.: 11tl602