MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

ASSEMBLY - SWITCH

CATALOG LISTING
22AC1
KC-Q0010

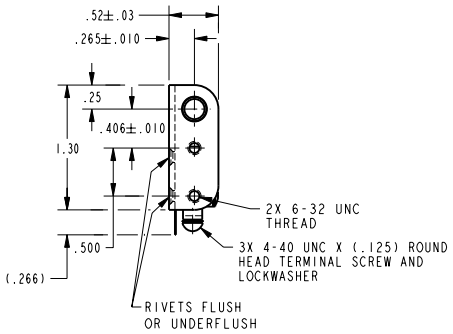

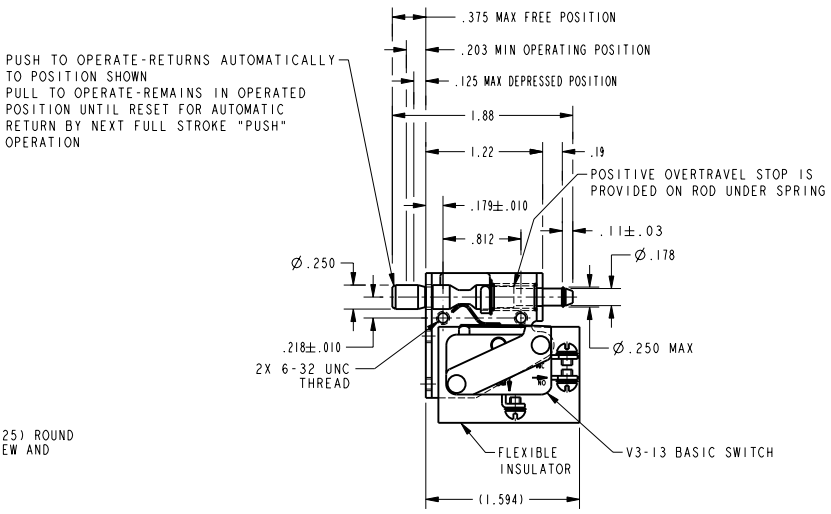

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .075 LB

CHARACTERISTICS	ELECTRICAL DATA
TOTAL TRAVEL .250 APPROX PUSH DIRECTION .187 APPROX PULL DIRECTION	CONTACT ARRANGEMENT S P D T
FULLY DEPRESSED FORCE ------ 4 LB MAX	15.1A 1/2HP 125, 250 VAC 1/2A 125 VDC, 1/4A 250 VDC 5A 125 VAC "L"

NOTES
1 - NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
2 - BASIC SWITCH PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
3 - ACTUATOR ROD MADE OF HIGH STRENGTH PLASTIC
4 - WITH ROD IN EITHER ACTUATED POSITION BASIC SWITCH PLUNGER MUST HAVE .015 MIN OVERTRAVEL AND WITH ROD IN FREE POSITION BASIC SWITCH PLUNGER MUST HAVE .005 MIN RELEASE TRAVEL

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 22AC1 | PAGE 1 OF 1 | RELEASE NO. SR8853 | REPLACES
ISSUE 5 | CHECK
REVISIONS
A C096143 LJK 10 APR 00
CHECK | 10 APR 00 SAV | CHECK | 10 APR 00 LJK | DRAWN
PTC/CAD 2D

Downloaded from Elcodis.com electronic components distributor