MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

SWITCH – BASIC

CATALOG LISTING
V3–245
CK–C4500

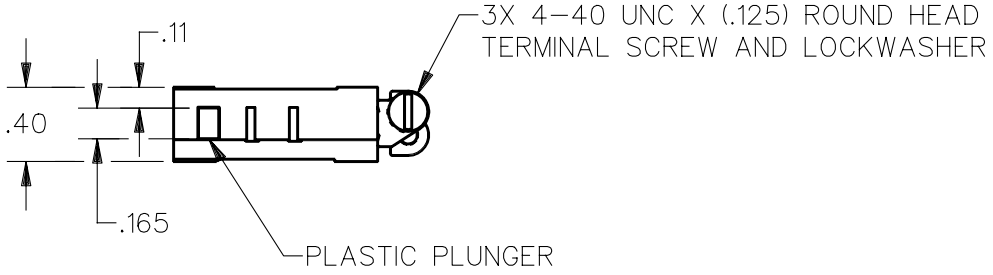

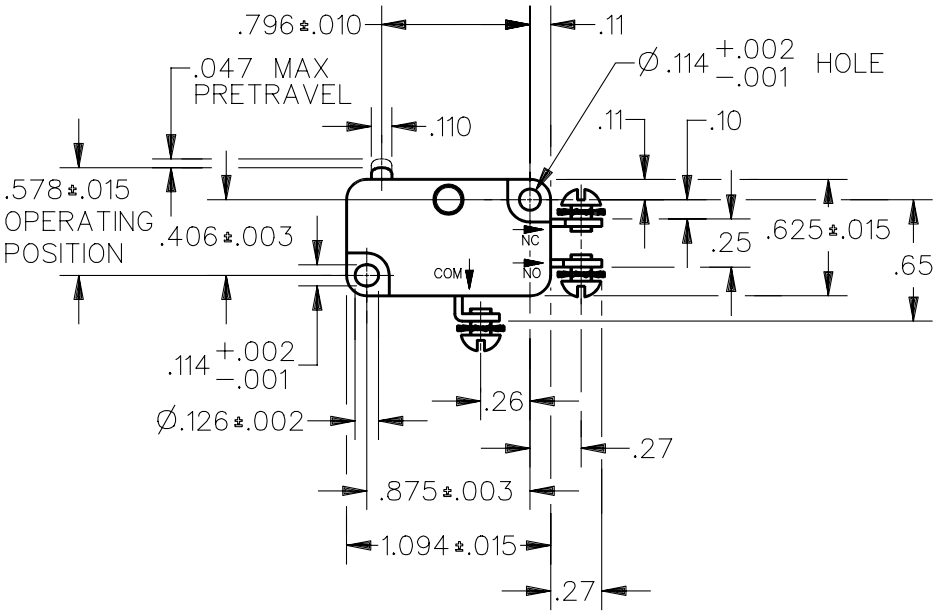

NOTE
1 – SWITCH MATERIALS WILL WITHSTAND TEMPERATURE OF 400°F FOR 100 HOURS

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE	10–25 OZ
RELEASE FORCE	6 OZ MIN
DIFFERENTIAL TRAVEL	.006–.016
OVERTRAVEL	.040 MIN
FREE POSITION	.625 MAX
RELEASE TRAVEL	.007 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L118

10A 1/8 HP 125 OR 250 VAC

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .017 LB

CATALOG LISTING V3–245 PAGE 1 OF 1
ISSUE 12

REVISIONS

A	OBS CO82209	CSL 18 OCT 96
B	RE–INST PR22527	DCS 7 JAN 97

REPLACES | RELEASE NO. | CHECK | CHECK | CHECK

DDM/CAD DRAWN DCS 7 JAN 97

Downloaded from Elcodis.com electronic components distributor