MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH – BASIC

CATALOG LISTING
3MN6

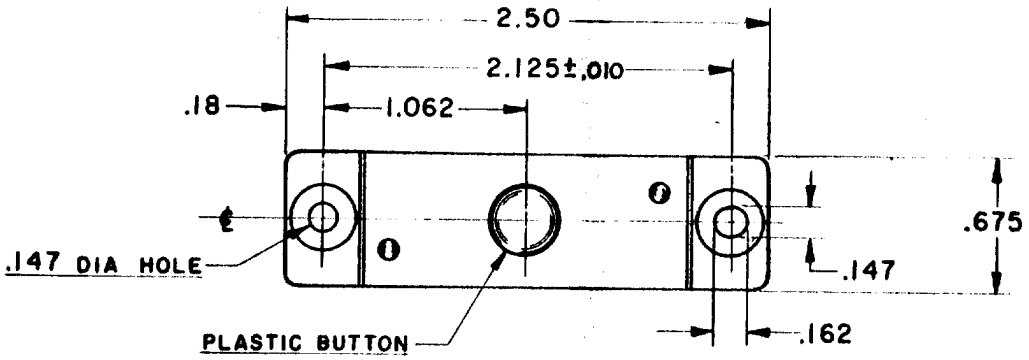

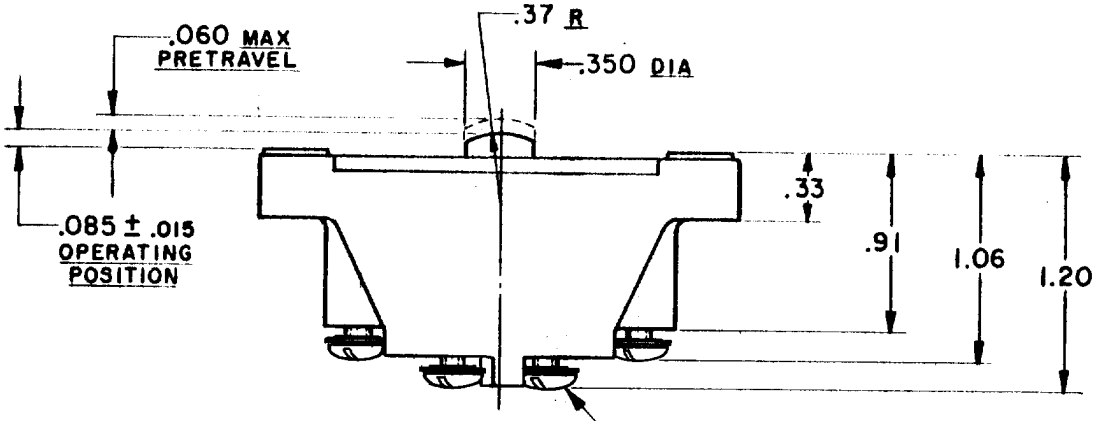

8-32 NC-2A X .230 REF
BINDER HEAD TERMINAL
SCREW AND LOCKWASHER (SEMS) (4)

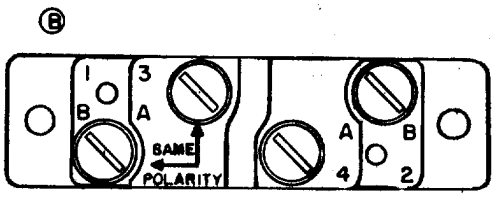

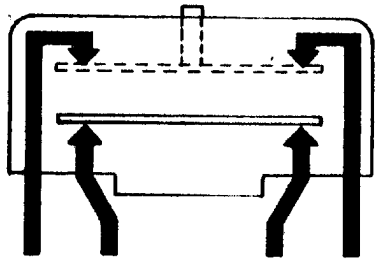

CIRCUIT DIAGRAM

NOTE –
1– MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 2.125 ±.005 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE	7 – 11 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.015 – .025
OVERTRAVEL	.080 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

UL RECOGNIZED – FILE E22779
15 A – 120, 240, 480, OR 600 VAC
1/2 HP – 120 VAC; 1 HP – 240 VAC
0.8 A – 115 VDC; 0.4 A – 230 VDC
PILOT DUTY RATING: 600 VAC MAX

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

REVISIONS

A	SR 8314	M B F 24 JUNE 59
B	CORR	L M H 11 AUG 59
C	CO 15776	K L B 18 APR 61
D	CO39150	W L W 6 SEPT 77

ISSUE X X X
DRAWING NUMBER M 3MN6
RELEASE NO. SR 8314
REPLACES

DRAWN R. E. R. 9 APR 59
CHECK G C H 24 JUN 59
CHECK
CHECK J S K 9 APR 59
CHECK

FO-50378

Downloaded from Elcodis.com electronic components distributor