
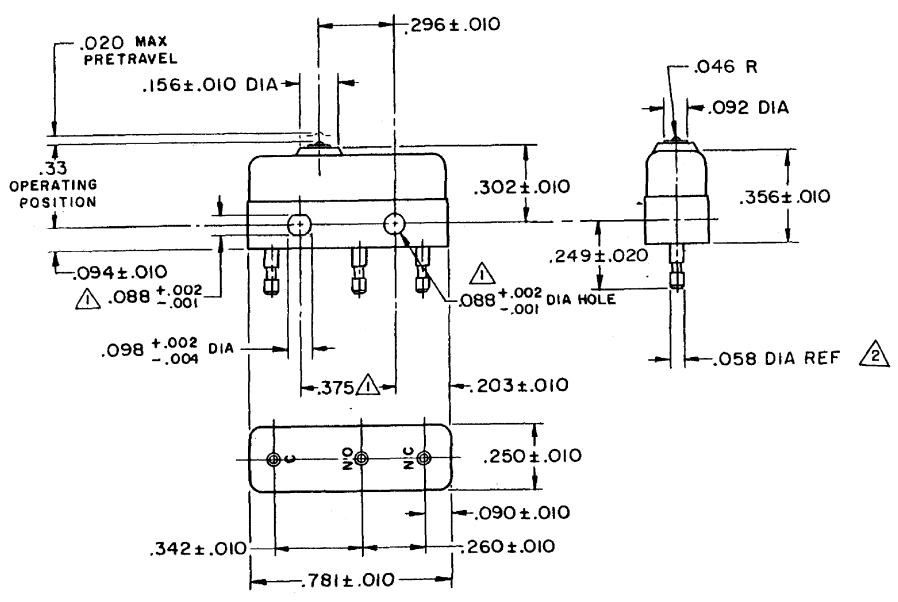


FO-55111-A

HONEYWELL
PART NUMBER
11SM701-H58
PRODUCT CODE
TWY1990

REV	DOCUMENT	CHANGED BY	CHECK
8	0038442	SSK 31MAR08	BLR



NOTE -

△ 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS

△ 2 PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES.

RELEASE NO. PR - 2974
REPLACES

CHARACTERISTICS
OPERATING FORCE - - 56 GRAM MAX
RELEASE FORCE - - - 14 GRAM MIN
DIFFERENTIAL TRAVEL - - .002 MAX
OVERTRAVEL - - - - .005 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP 2.5 AMP
RESISTIVE	5 AMP 5 AMP
MAXIMUM INRUSH 24 AMP	
APPROVALS	
UL, CSA	4A, 250 VAC
	BRAND 119

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	06 FEB 08
CHECK	RJ	06 FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SM701-H58	8
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1

4

3

2

1