
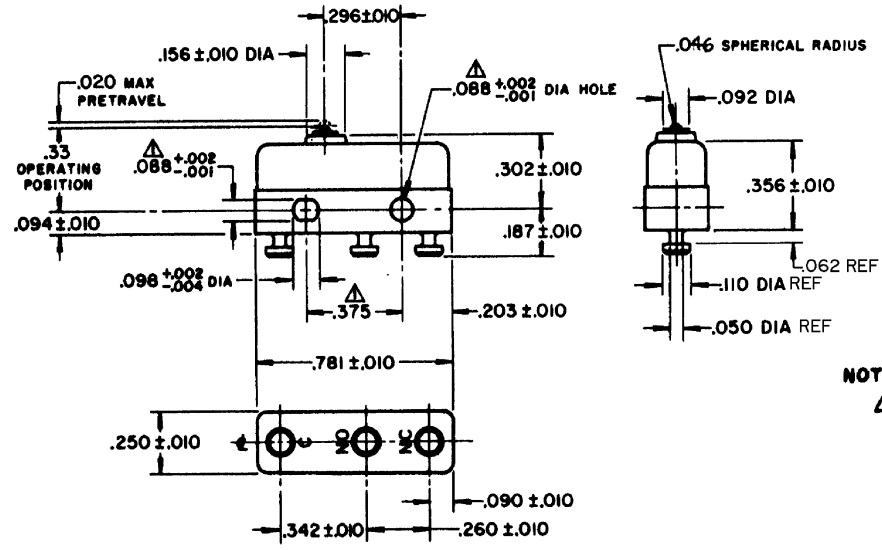


FO-55111-A

HONEYWELL
PART NUMBER
11SM244-T
PRODUCT CODE
TWW4460

REV	DOCUMENT	CHANGED BY	CHECK
7	0038223	SSK 17APR08	BLR



NOTE -
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .007 MAX DIA ON .375 ± .002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 400° F

RELEASE NO. SR - 9651
 REPLACES -

CHARACTERISTICS
OPERATING FORCE - - - - 3 - 5 OZ
RELEASE FORCE - - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .004 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA
KEMA CE 5A, 250V ~ T85 1E4
UL CSA 5A, 250 VAC 0.3A 125 VDC

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE .X ± 0.030
ONE PLACE .XX ± 0.015
TWO PLACE .XXX ± 0.005
THREE PLACE .XXXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	27 NOV 07
CHECK	RJ	27 NOV 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SM244-T	7
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1

4

3

2

1