
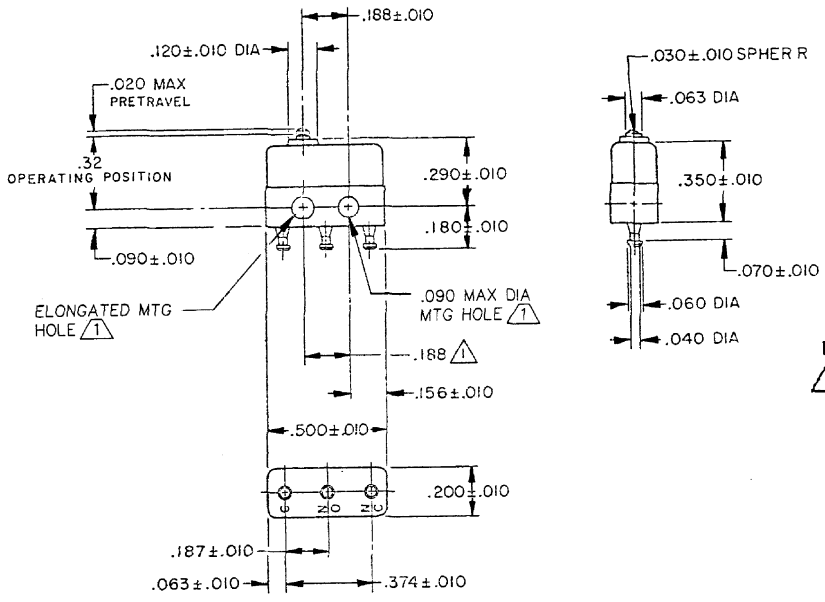


FO-55111-A

HONEYWELL
PART NUMBER
11SX1-T
PRODUCT CODE
VDJ1000

REV	DOCUMENT	CHANGED BY	CHECK
9	0038448	VS 28APR08	BLR



NOTES
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 2 - TERMINALS ARE PLATED FOR SOLDERING
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR-298
REPLACES	

CHARACTERISTICS
OPERATING FORCE - - - 3.5 OZ MAX
RELEASE FORCE - - - .75 OZ MIN
DIFFERENTIAL TRAVEL - - .001 MAX
OVERTRAVEL - - - .004 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
28 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	2 AMP
RESISTIVE	3 AMP
APPROVALS	
KEMA CE	3A 250V~T125 SE4
UL CSA	3A 250 VAC

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	SPK	08FEB08
CHECK	RJ	08FEB08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	11SX1-T	9
SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1

4

3

2

1