


FO-55111-A
 HONEYWELL
 PART NUMBER
 91SX39-T
 PRODUCT CODE
 VDQ9100
 MILITARY PART NUMBER
 M8805/109-01

REV	DOCUMENT	CHANGED BY	CHECK
3	0038450	PK 03JUN08	ASD

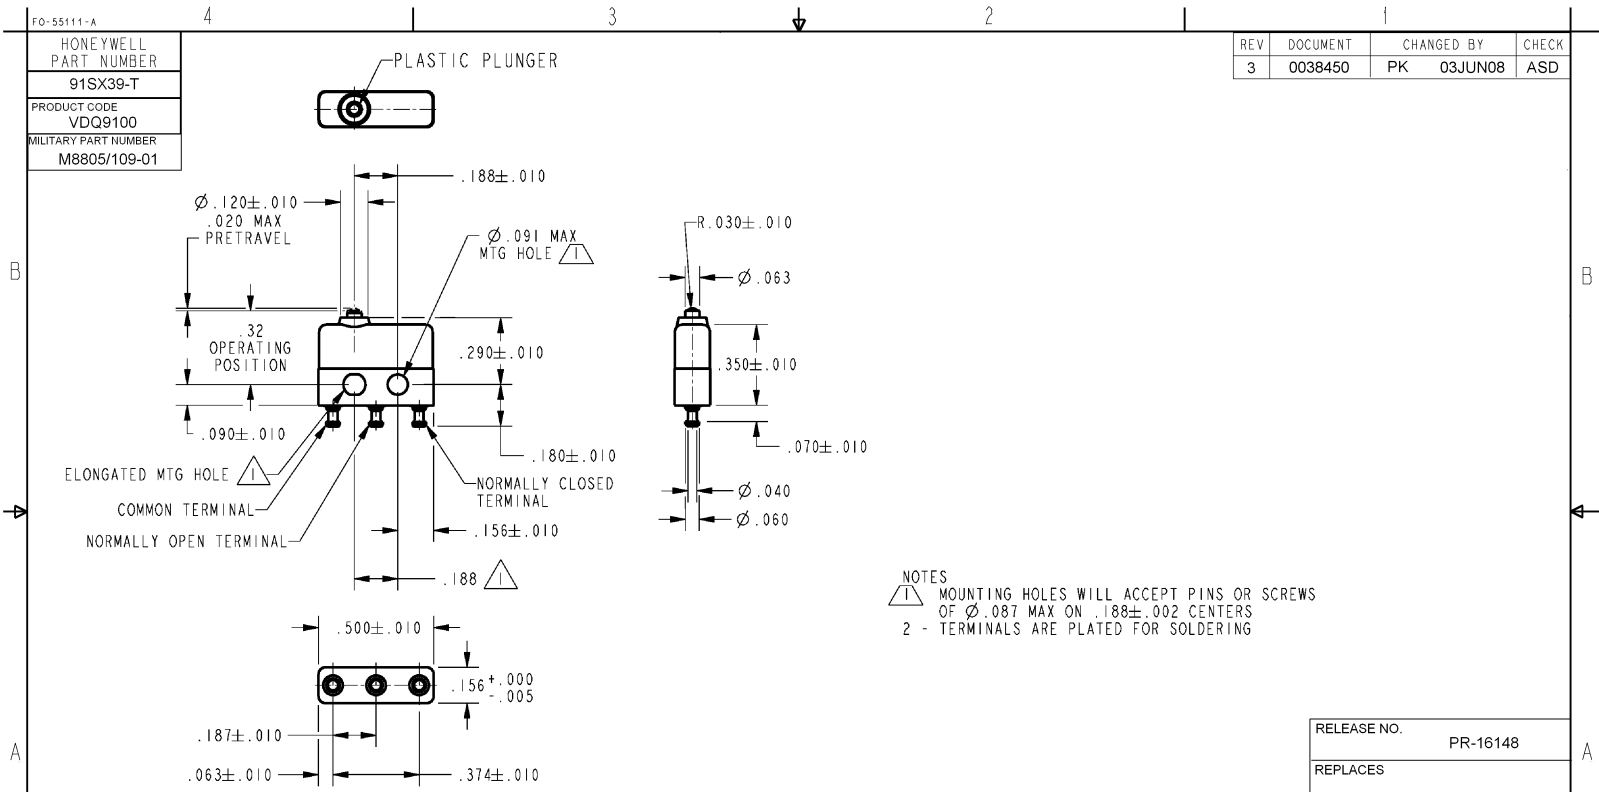

NOTES
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF $\phi .087$ MAX ON $.188 \pm .002$ CENTERS
 2 - TERMINALS ARE PLATED FOR SOLDERING

RELEASE NO. PR-16148
 REPLACES

CHARACTERISTICS OPERATING FORCE..... 5 OZ MAX RELEASE FORCE..... 1 OZ MIN DIFFERENTIAL TRAVEL.... .005 MAX OVERTRAVEL..... .004 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T 28 VOLTS DC RATING 115 VOLTS AC 60 CPS SEA LEVEL 50,000 FT SEA LEVEL INDUCTIVE 4 AMP 2.5 AMP 7 AMP RESISTIVE 7 AMP 4 AMP 7 AMP LAMP 2.5 AMP 2.5 AMP 2 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±	DRAWN SPK 05MAR08	Honeywell TITLE SWITCH - BASIC
			CHECK RJ 05MAR08	
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			RASTER	SCALE - WEIGHT:.003 LB MAX SHEET 1 OF 1