MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

SWITCH–BASIC

CATALOG LISTING
DT–2RV–A7

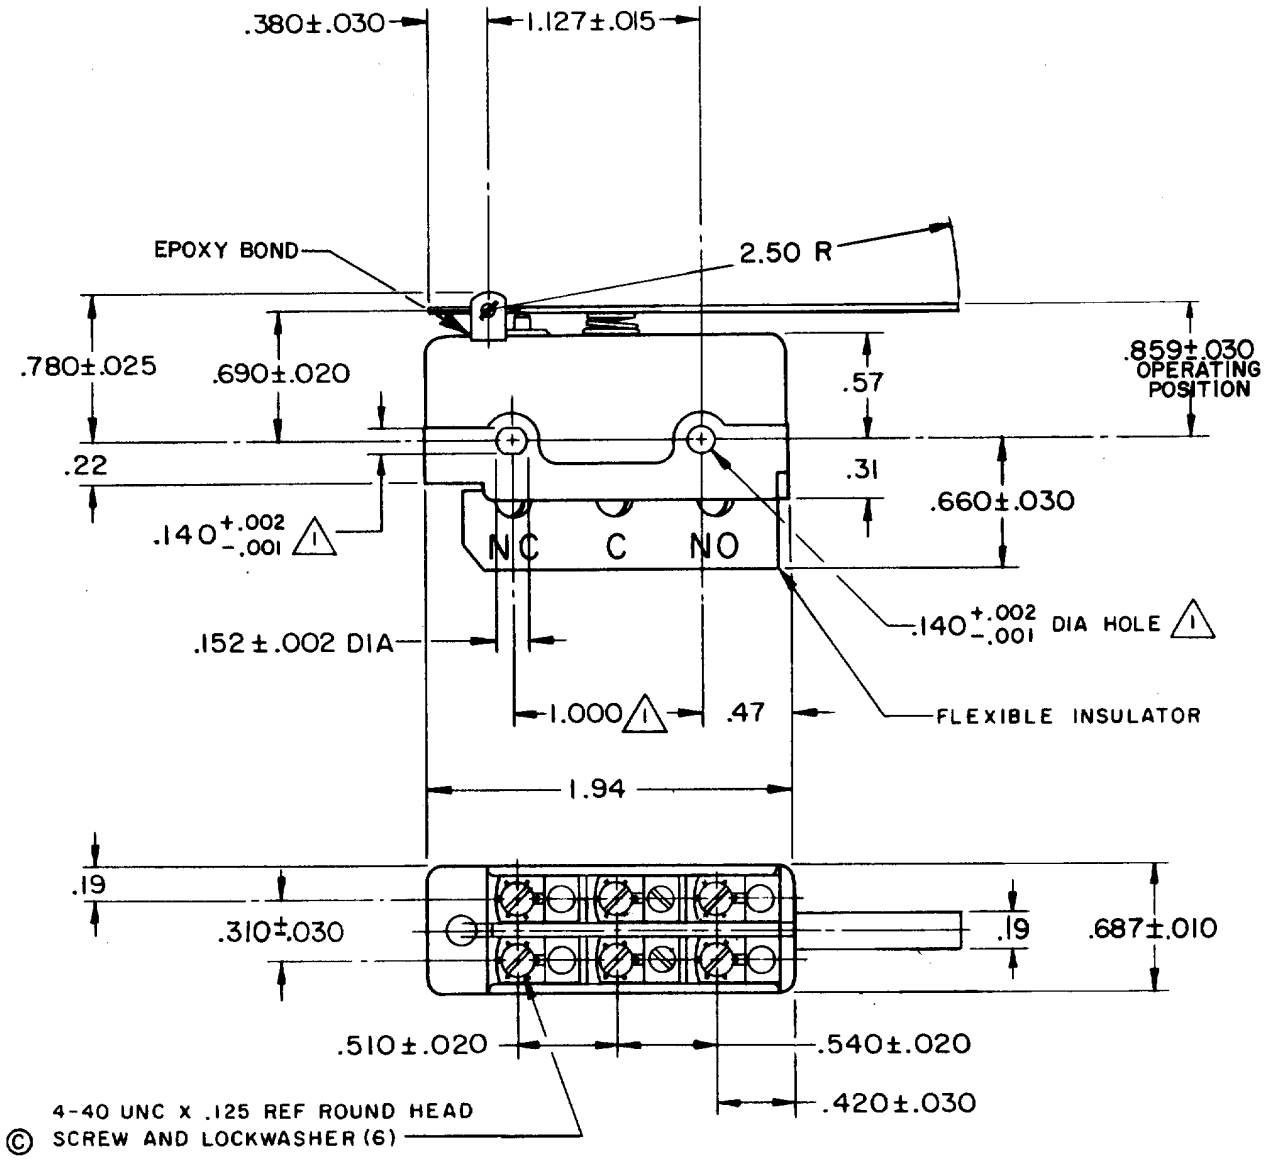

NOTE-
(1) MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE——————3 1/2–6 OZ

RELEASE FORCE——————1 OZ MIN
PRETRAVEL——————1.110 MAX
DIFFERENTIAL TRAVEL——————.490–.755
OVERTRAVEL——————.062 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
D P D T

UL LISTED-FILE E12252
CODE L59
10A-125 OR 250 VAC
0.3A-125 VDC; 0.15A-250 VDC

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .080 LB

DT–2RV–A7

M

DRAWING NUMBER

ISSUE 13

REPLACES

RELEASE NO.

CHECK

REVISIONS

A	C017725	LEB 10 JUNE 63
B	C017725	LEB 28 AUG 63
C	C024941	MBS 2 DEC 68
D	C026075	MBS 26 AUG 69
E	C037528	CJH 31 AUG 76
F	C038280	KPK 30 MAR 77
G	CO 39046	GAS 16 SEPT 77
H	C061634	TSK 17 JUL 87

CHECK

19 JUN 63

X S O

CHECK

DRAWN LEB 10 JUNE 63

FO-50378

Downloaded from Elcodis.com electronic components distributor