


FO-55111-A
 HONEYWELL
 PART NUMBER
41SM1-T
 PRODUCT CODE
 TYC0160
 FAA-PMA

REV	DOCUMENT	CHANGED BY	CHECK
11	0038112	KVS 04JUN08	ASD

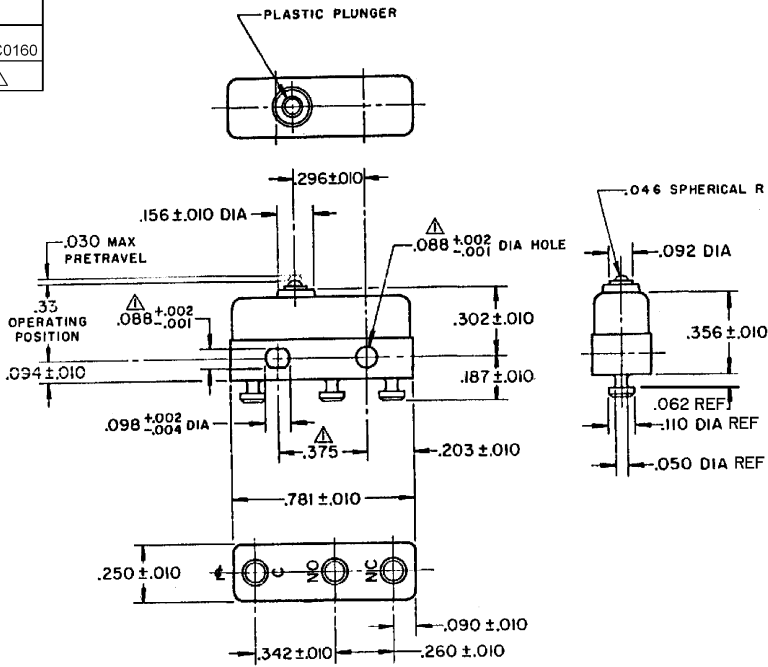

NOTES
 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 TERMINALS ARE PLATED FOR SOLDERING
 SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 FOR MANUFACTURING DETAIL SEE ASSEMBLY DRAWING 41SM1-T FOR FAA-PMA

RELEASE NO. SR - 11353
 REPLACES -

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN VK 24 OCT 07	Honeywell			
OPERATING FORCE - - - - 3 - 5 OZ	CONTACT ARRANGEMENT SPDT	NO PLACE .X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±	CHECK RJ 24 OCT 07	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			
RELEASE FORCE - - - - 1 OZ MIN	APPROVALS KEMA CE 11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4	THIRD ANGLE PROJECTION	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	SIZE B	TYPE I	DRAWING NAME 41SM1-T	REV 11
DIFFERENTIAL TRAVEL - - - .004 MAX	UL CSA 11A 1/4 HP 125 250 VAC 5A 30 VDC 1/2 A 125 VDC		RASTER	SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1	
OVERTRAVEL - - - - .005 MIN	AVIATION FAA - PMA						