


FO-55111-A

HONEYWELL
PART NUMBER
311SM7-T
PRODUCT CODE
TZA1400

REV	DOCUMENT	CHANGED BY	CHECK
5	0038114	KVS 03JUN08	ASD

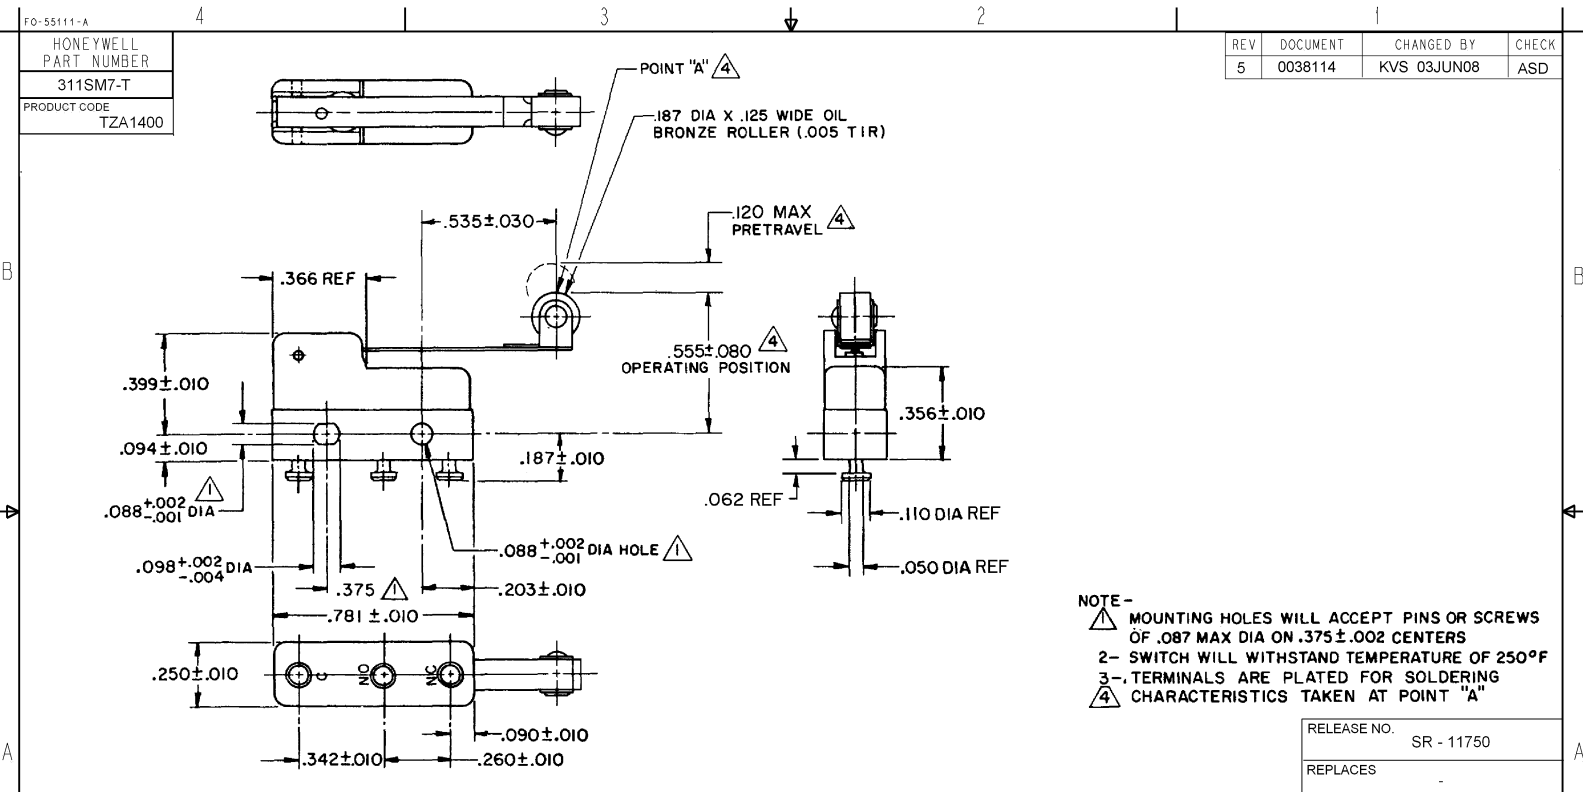

NOTE -
 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
 2 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 3 TERMINALS ARE PLATED FOR SOLDERING
 4 CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO. SR - 11750
 REPLACES -

CHARACTERISTICS 4 OPERATING FORCE - - 30 GRAM MAX RELEASE FORCE - - - 5 GRAM MIN DIFFERENTIAL TRAVEL - - .027 MAX OVERTRAVEL - - - - .026 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S P D T 30 VOLTS DC RATING SEA LEVEL 50,000 FT INDUCTIVE 3 AMP 2.5 AMP RESISTIVE 5 AMP 5 AMP MAXIMUM INRUSH 24 AMP	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± 0.030 ONE PLACE .XX ± 0.015 TWO PLACE .XXX ± 0.005 THREE PLACE .XXXX ± FOUR PLACE .XXXXX ± ANGLES ±	DRAWN VK 02 NOV 07 CHECK RJ 02 NOV 07	Honeywell TITLE SWITCH - BASIC
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	
APPROVALS KEMA CE 5A, 250V ~ T85 1E4 UL CSA 5A, 250 VAC ~		THIRD ANGLE PROJECTION	RASTER	