
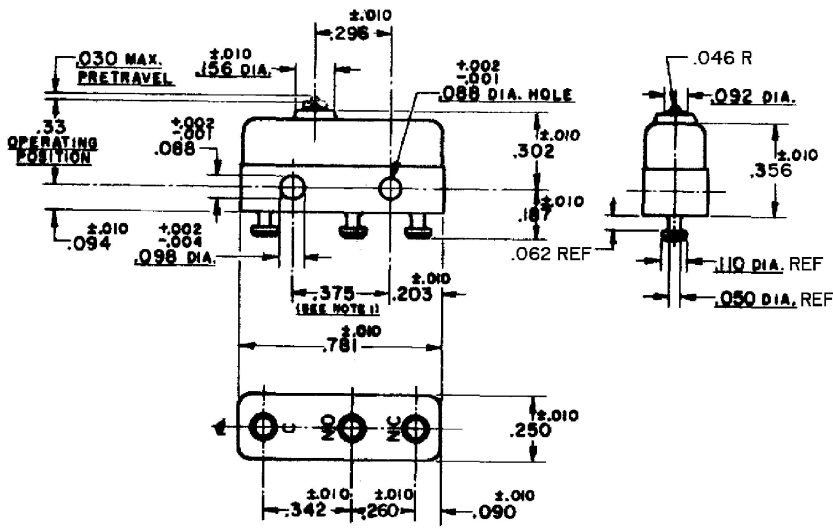


HONEYWELL  
PART NUMBER  
**1SM3-T**  
PRODUCT CODE:  
JG-80305

REV	DOCUMENT	CHANGED BY	CHECK
11	0034444	JA 15OCT07	PSR

**FOR FACTORY USE ONLY**



**NOTE -**  
 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2 - TERMINALS ARE PLATED FOR SOLDERING  
 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.:  
-  
REPLACES  
-

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH	DRAWN	JA	15OCT07	<b>Honeywell</b>			
OPERATING FORCE-----3-5 OZ.	CONTACT ARRANGEMENT SPDT	TOLERANCES UNLESS NOTED:	CHECK	PSR	15OCT07	TITLE			
RELEASE FORCE-----1 OZ. MIN.	30 VOLTS DC RATING	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			SWITCH-BASIC			
DIFFERENTIAL TRAVEL-----.004 MAX.	INDUCTIVE	ONE PLACE .X ±	INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME	REV
OVERTRAVEL-----.005 MIN.	RESISTIVE	TWO PLACE .XX ±				<b>B</b>	<b>I</b>	1SM3-T	11
APPROVALS:		THIRD ANGLE PROJECTION	RASTER			SCALE	WEIGHT	.006 LB MAX	SHEET
UL, CSA	5A, 250VAC	CE							1 OF 1