
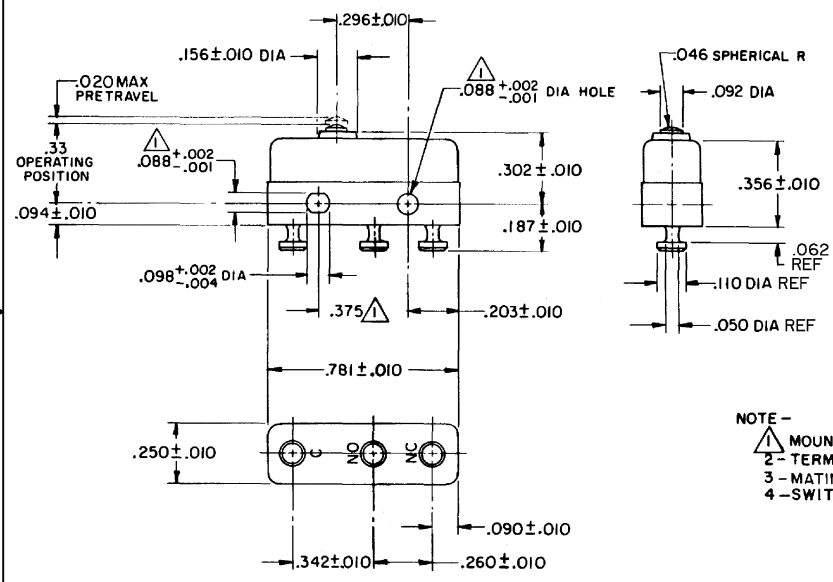


FO-55111-A

HONEYWELL PART NUMBER
11SM1077-T
PRODUCT CODE
TWY2330
JG-80643

REV	DOCUMENT	CHANGED BY	CHECK
6	0038444	KVS 09APR08	ASD



**NOTE -**

- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF  $.087$  MAX DIA ON  $.375 \pm .002$  CENTERS
- TERMINALS ARE PLATED FOR SOLDERING
- MATING CONTACT SURFACES ARE OVERLAYS OF 24K SOLID GOLD AND GOLD ALLOY
- SWITCH WILL WITHSTAND TEMPERATURE OF  $250^{\circ}$  F

RELEASE NO.	PR - 4751
REPLACES	-

<b>CHARACTERISTICS</b> OPERATING FORCE - - - - 3 - 5 OZ RELEASE FORCE - - - - 1 OZ MIN DIFFERENTIAL TRAVEL - - - .004 MAX OVERTRAVEL - - - - - .005 MIN	<b>ELECTRICAL DATA</b> CONTACT ARRANGEMENT S P D T	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± 0.030 ONE PLACE .XX ± 0.015 TWO PLACE .XXX ± 0.005 THREE PLACE .XXXX ± FOUR PLACE .XXXX ± ANGLES ±	DRAWN VK 14 FEB 08 CHECK RJ 14 FEB 08	<b>Honeywell</b> TITLE SWITCH - BASIC
			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	
APPROVALS UL CSA 0.1A 125 VAC 30 VDC R1 @ BRAND 171		THIRD ANGLE PROJECTION		