


FO-55111-A  
 HONEYWELL  
 PART NUMBER  
 311SM705-T  
 PRODUCT CODE  
 TZA2685

REV	DOCUMENT	CHANGED BY	CHECK
7	0038445	SSK 21APR08	BLR

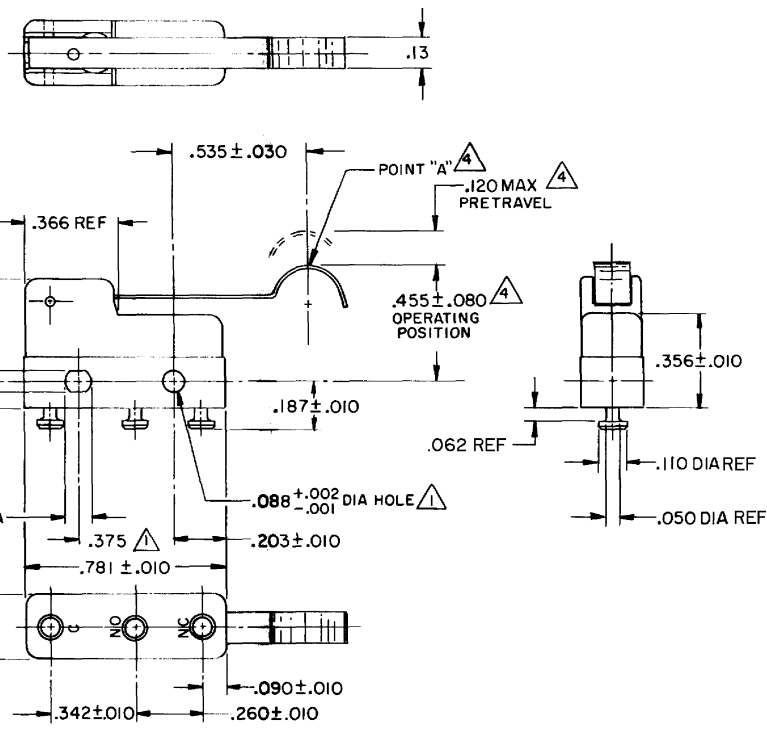

**NOTES**  
 △ MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS  
 2- SWITCH WILL WITHSTAND TEMPERATURE OF 250°F  
 3- TERMINALS ARE PLATED FOR SOLDERING  
 △ - CHARACTERISTICS TAKEN AT POINT "A"

RELEASE NO. PR-275  
 REPLACES -

CHARACTERISTICS	△
OPERATING FORCE	12 GRAM MAX
RELEASE FORCE	2 GRAM MIN
DIFFERENTIAL TRAVEL	.015 MAX
OVERTRAVEL	.026 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT S P D T	
30 VOLTS DC RATING	
SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP 2.5 AMP
RESISTIVE	5 AMP 5 AMP
MAXIMUM INRUSH 24 AMP	
UL, CSA	4A, 250 VAC
BRAND	L119

DESIGN UNITS: INCH	
TOLERANCES UNLESS NOTED:	
NO PLACE	.X ±
ONE PLACE	.X ±
TWO PLACE	.XX ±
THREE PLACE	.XXX ±
FOUR PLACE	.XXXX ±
ANGLES	±
THIRD ANGLE PROJECTION	

DRAWN	VK	21FEB 08
CHECK	RJ	21FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

<b>Honeywell</b>			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	311SM705-T	7
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1