


FO-55111-A

HONEYWELL
PART NUMBER
1SX74-T
PRODUCT CODE
VDA6560

REV	DOCUMENT	CHANGED BY	CHECK
8	0038446	KVB 20MAY08	BLR

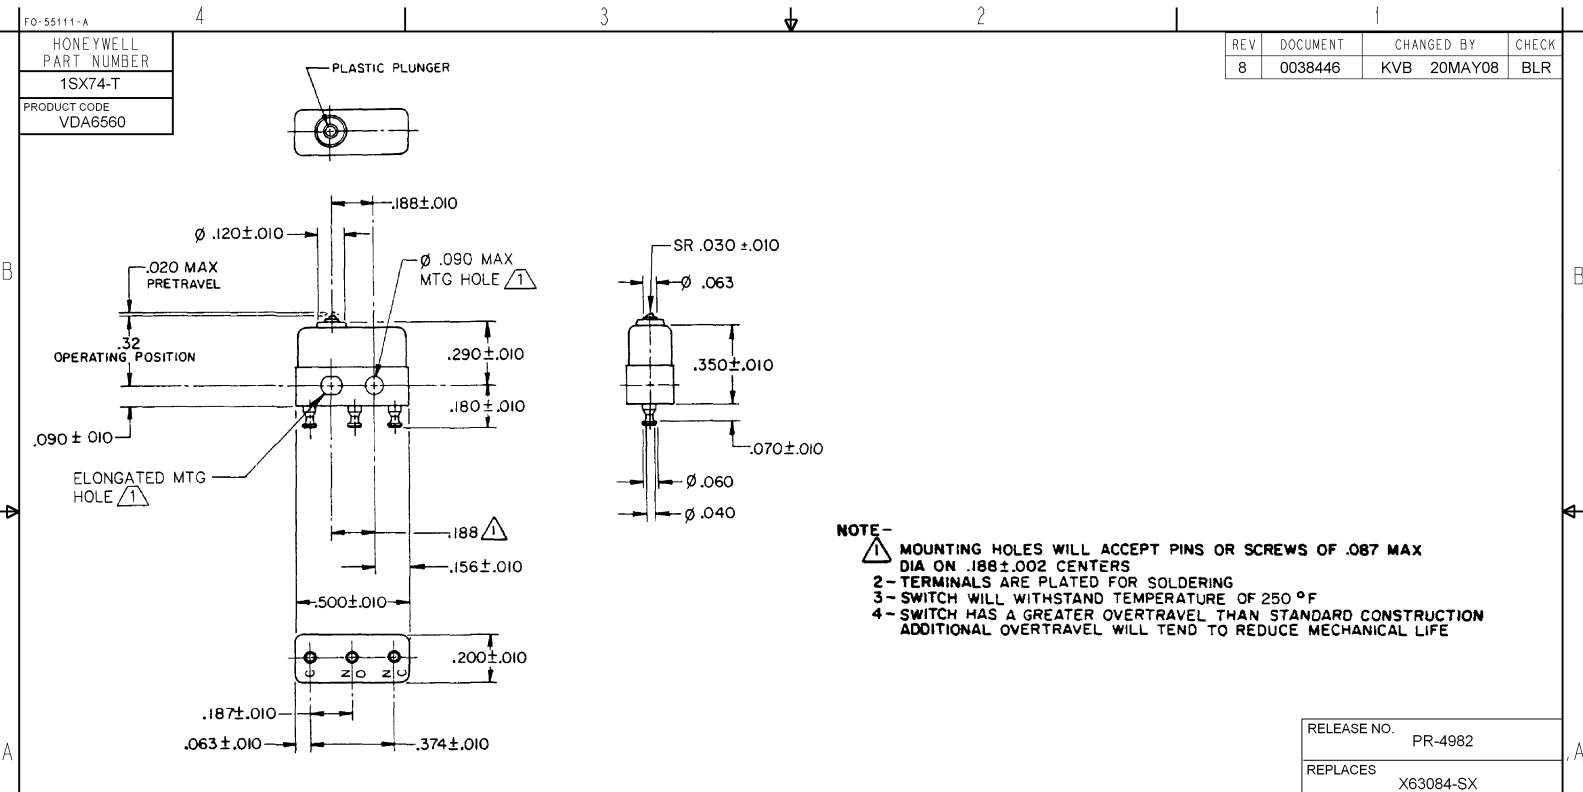

RELEASE NO.	PR-4982
REPLACES	X63084-SX

CHARACTERISTICS OPERATING FORCE - - - - 5 OZ MAX RELEASE FORCE - - - - 1 OZ MIN DIFFERENTIAL TRAVEL - - - .005 MAX OVERTRAVEL - - - - - .010 MIN	ELECTRICAL DATA CONTACT ARRANGEMENT S-P-D-T 28 VOLTS DC RATING SEA LEVEL 50,000 FT INDUCTIVE 4 AMP 2.5 AMP RESISTIVE 7 AMP 7 AMP MAXIMUM INRUSH 24 AMP APPROVALS: KEMA CE 7A 250V~ T125 5E4 CE UL CSA 7A 250 VAC	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE .X ± ONE PLACE .XX ± TWO PLACE .XXX ± THREE PLACE .XXXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION	DRAWN SPK 03DEC07 CHECK RJ 03DEC07	Honeywell TITLE SWITCH - BASIC
			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY	