


HONEYWELL PART NUMBER
12SM4 - T
PRODUCT CODE
TXA0460
JG-80587

REV	DOCUMENT	CHANGED BY	CHECK
7	0038111	PK 20MAY08	ASD

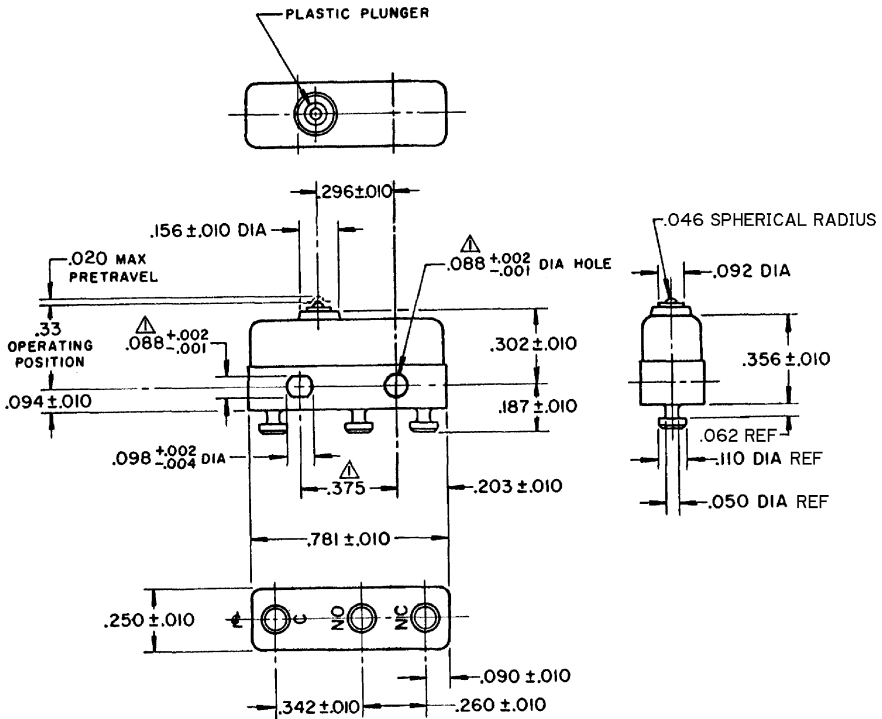

NOTE -
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ±.002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250°
 4-CONTACT MATERIAL 24K GOLD PLATED

RELEASE NO.	ETS SR 9650
REPLACES	-

CHARACTERISTICS	ELECTRICAL DATA	DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:	DRAWN	VK	17OCT07	Honeywell
			CHECK	RJ	17OCT07	
OPERATING FORCE - - - - 3 - 5 OZ	CONTACT ARRANGEMENT S P D T	NO PLACE .X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE
RELEASE FORCE - - - - 1 OZ MIN	30 VOLTS DC RATING	ONE PLACE .X ±	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SWITCH - BASIC
DIFFERENTIAL TRAVEL - - .004 MAX	SEA LEVEL 50,000 FT	TWO PLACE .XX ±				SIZE
OVERTRAVEL - - - - .003 MIN	INDUCTIVE 1/2 AMP 1 AMP	THREE PLACE .XXX ±	B	I	12SM4-T	7
	RESISTIVE 1 AMP 1 AMP	FOUR PLACE .XXXX ±	SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1
	MAXIMUM INRUSH 2 AMP	ANGLES ±	RASTER			
APPROVALS	KEMA CE 1A, 250V ~ T85 1E4	THIRD ANGLE PROJECTION				
	UL CSA 1A, 125 VAC					