

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
 FEDERAL MANUFACTURER'S CODE 91929

SWITCH - BASIC

(M) BA-2RQ1-A2
 ISSUE 5

BA-2RQ1-A2
 PAGE 1 OF 1

M

DRAWING NUMBER

14

ISSUE

REVISIONS

A	CO 9600	R. E. R.	MAR 59
B	CO14866	J. J. D.	AUG 60
C	CO27518	L. S. D.	JUN 70
D	CO57732	P. K.	NOV 78
E	CO 48448	S. L. B.	FEB 79
F	CO 73287-J	J. A. L.	NOV 93
G	CO 77590	S. A. D.	JUN 94
H	CO-82133	CSL	JUL 96
J	CO93346	D. L. T.	SEP 98

REPLACES

RELEASE NO.

CHECK

CHECK

CHECK


CHECK

CHECK

CHECK

CHECK

CHECK

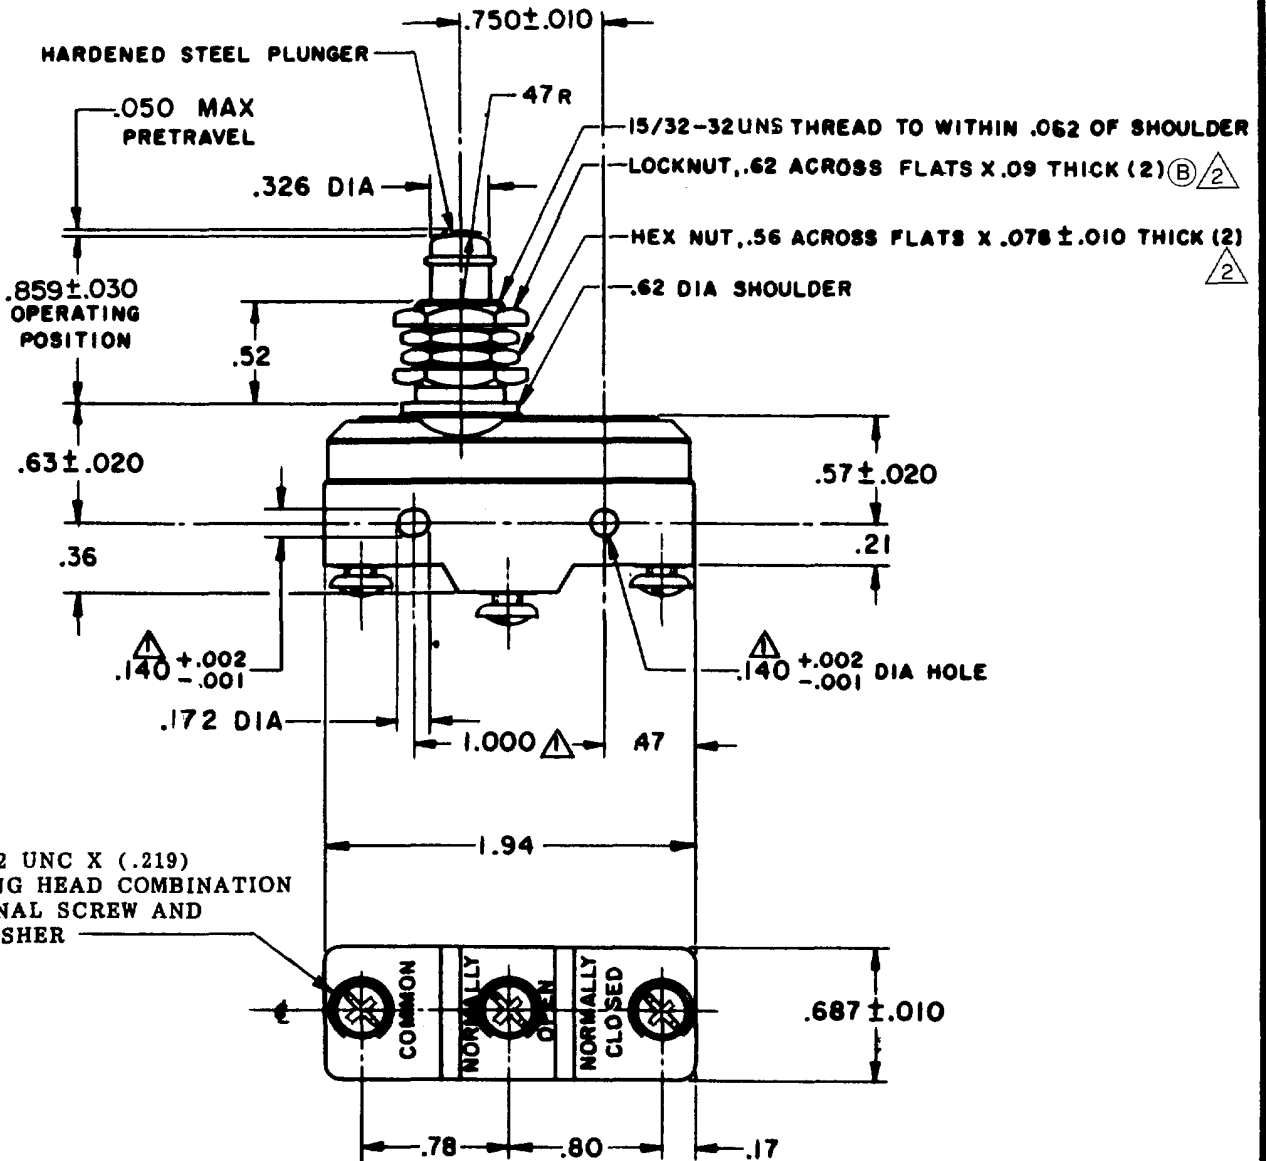

3X 6-32 UNC X (.219)
 BINDING HEAD COMBINATION
 TERMINAL SCREW AND
 CUPWASHER

NOTES

- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	SCALE FULL
OPERATING FORCE-----14-22 OZ	CONTACT ARRANGEMENT S P D T	DO NOT SCALE PRINT
RELEASE FORCE-----10 OZ MIN	UL LISTED - FILE E12252 20A - 125, 250 OR 480 VAC; 10A - 125 VAC "L" 1 1/2HP-125 VAC; 2HP-250 VAC CODE L97 1/2A-125 VDC; 1/4A-250 VDC L288 L299 L308 20(3)A 250V ~ T85 5E4	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.000 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±
DIFFERENTIAL TRAVEL-----.002-.0075		WEIGHT .093 LB
OVERTRAVEL-----.219 MIN		

FORMTEK

DRAWN

R. E. R. 2 MAR 59

0-30378