


NOTES:

1. ALL DIMENSIONS IN MM
2. TERM. NOS. FOR REF ONLY
3. RATING: DC 12V, 50mA
4. TRAVEL: 0.25±0.1mm
5. CONTACT RESISTANCE: 100m Ohms Max.
6. LIFE: 100,000 CYCLES Min.
7. INSULATION RESISTANCE: 100M Ohms Min.
8. DIELECTRIC STRENGTH: 250 V RMS Min.

REV.	DESCRIPTION	DATE	CHKD
B	CHANGED TOLERANCE	12/08/10	BGL
A	RELEASED FOR PRODUCTION		

TOLERANCES	
0.0	±0.4
0.00	±0.25

TITLE		SCALE	DATE	DR	DWG	REV
TL 1105 S F250 Q (STD. BRCKT)		4:1	7/2/98	MM	P021300	B

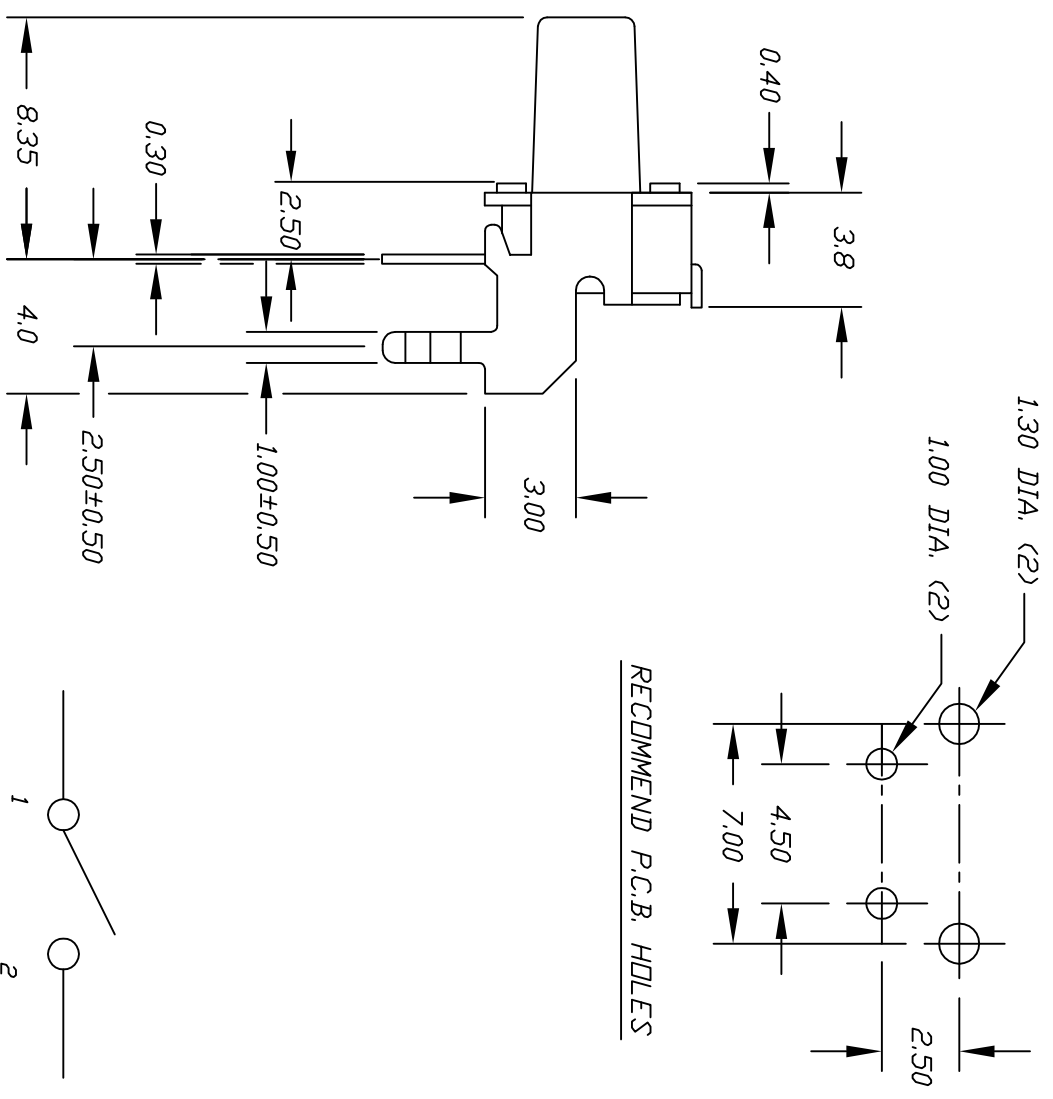

RECOMMEND P.C.B. HOLES

