
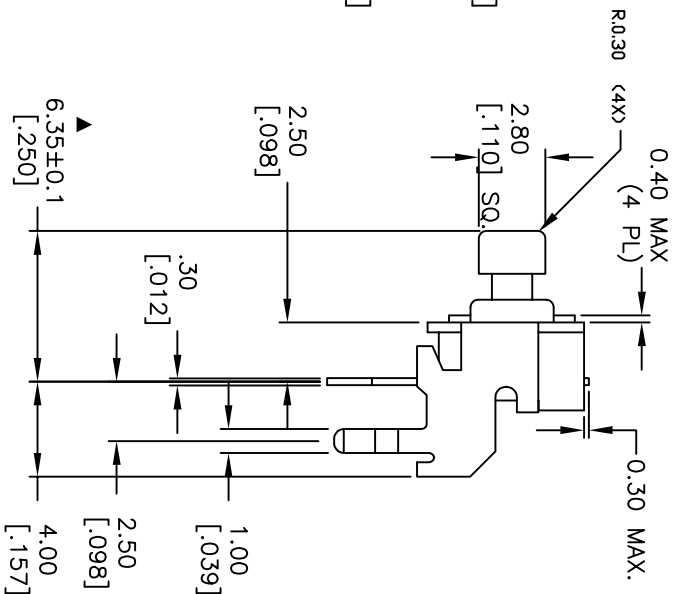
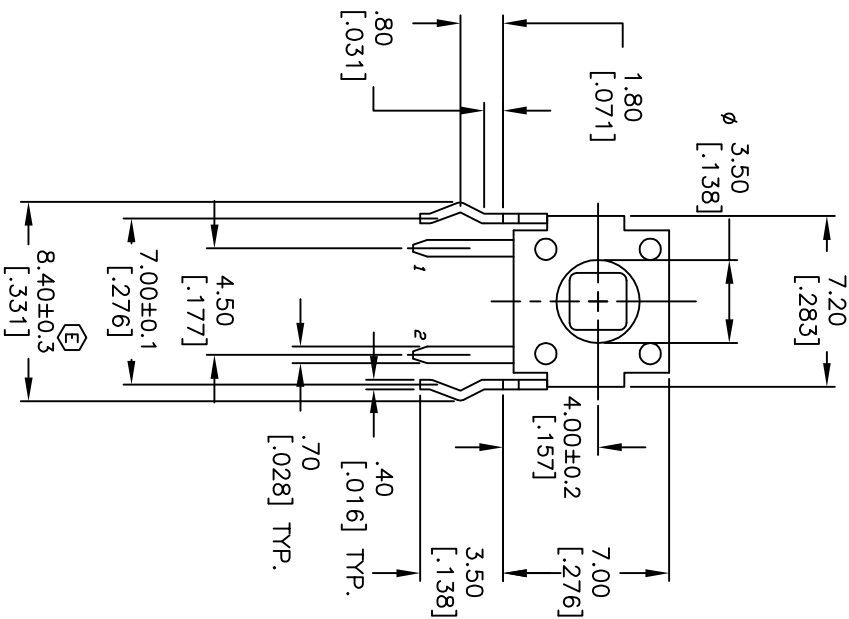


- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATINGS: 12VDC, 50mA
 5. OPERATING FORCE: 160±50gf
 6. TRAVEL: 0.25±0.1mm
 7. CONTACT RESISTANCE: 100 MILLI Ω Max.
 8. DIELECTRIC STRENGTH: 250V RMS min.
 9. INSULATION RESISTANCE: 100 Mega Ω min.
 10. ELECTRICAL LIFE: 100,000 CYCLES min.
 11. DESIGNATE MAJOR FEATURE:
 12. HOUSING COLOR: BLACK
 13. 2002/95/EC (ROHS) COMPLIANT

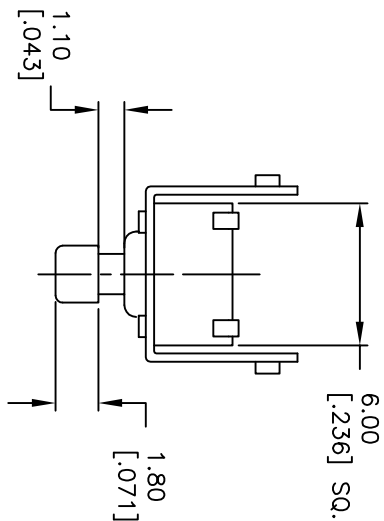

E	18742	LEG TOLERANCE WAS +/- 0.1	1/12/10	BLR
D	12357	ADD NOTE 12	8/7/02	CB
C1	12354	ADD NOTCH	8/6/02	CB
REV.	ECN NO.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 3:1

DATE 1/12/10

DR BLR

DWG P010205

REV E

TITLE

TL1105JA F160 Q

E-SWITCH®

LAMB INDUSTRIES