110/216-Series




The 110/216-Series toggle switches utilize a quick-make, quick-break contact mechanism and are available in both single and double pole. These switches are 125-250 volts AC/DC rated and suitable for shallow back panel applications. They are available in a range of circuits, terminations and bushing/toggle configurations.

Specifications

- Certifications*: UL, CSA
- $\bullet \, Dielectric\, Strength: 1,000V(minimum)$
- Insulation Resistance: 100 Megohms (minimum)
- Base Material: Phenolic
- Actuator Material: Brass/Nickel Plate
- Bushing Material: Brass/Nickel Plate

* Due to ongoing technological advances, consult factory for certification specifics.

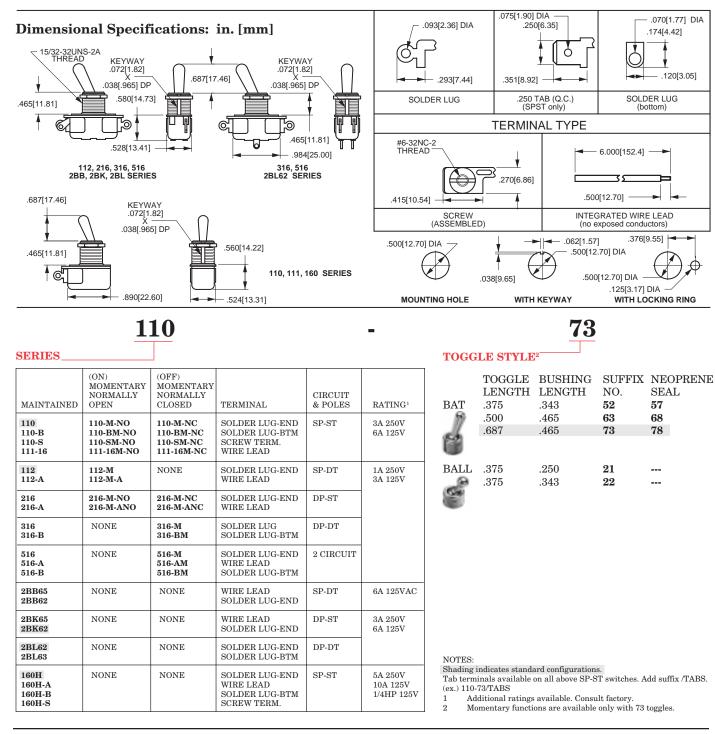

58 Carlingswitch, Inc. (860) 793-9281 • Carlingswitch, LTD. Int + 44 1392-364422 • Carlingswitch Asia-Pacific, LTD. Int + 852-2737-2277

Downloaded from Elcodis.com electronic components distributor