MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE

CATALOG LISTING
2NT1 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	CIRCUIT MADE WITH TOGGLE LEVER IN (4) KEYWAY SIDE (1-2, 4-5)	CENTER (1-2, 4-5)	OPPOSITE KEYWAY (2-3, 5-6)	ELECTRICAL DATA
2NT1-1	ON	OFF	ON	L191 15A 125, 250, 277 VAC 1/2HP 125 VAC 1HP 250, 277 VAC 5A 125 VAC "L"
2NT1-2	OFF	NONE	ON	
2NT1-3	ON	NONE	ON	
2NT1-21	NONE	OFF	ON	
2NT1-31	NONE	ON	ON	
2NT1-4	MOM OFF	NONE	ON	L192 10A 125, 250, 277 VAC 1/4HP 125 VAC, 1/2HP 250, 277 VAC 3A 125 VAC "L"
2NT1-5	MOM ON	OFF	ON	
2NT1-6	MOM ON	NONE	OFF	
2NT1-7	MOM ON	OFF	MOM ON	
2NT1-8	MOM ON	NONE	ON	
2NT1-51	NONE	ON	MOM ON	
2NT1-61	MOM ON	OFF	NONE	

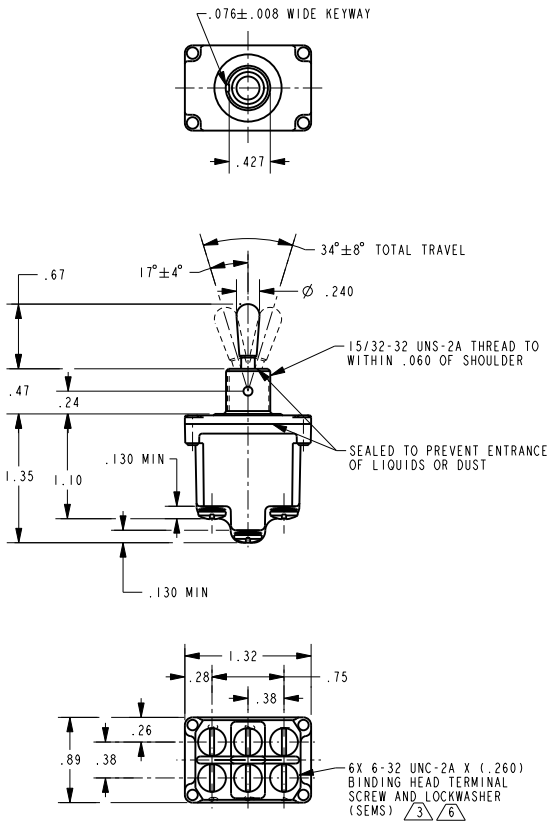

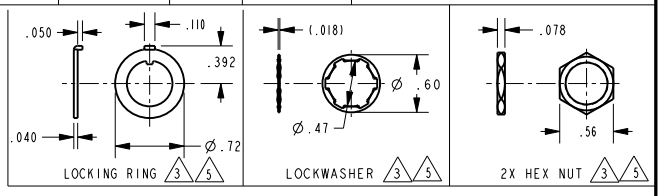

NOTES
1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
(3) FURNISHED UNASSEMBLED
(4) APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
(5) "NH" SUFFIX MUST BE ADDED TO SPECIFY NO HARDWARE (EX 2NT1-1-NH)
(6) "COMB" SUFFIX MUST BE ADDED TO SPECIFY 6-32 UNC-2A X (.260) COMBINATION DRIVE STYLE BINDING HEAD TERMINAL SCREW AND LOCKWASHER (SEMS) (EX 2NT1-7-COMB)

THIRD ANGLE PROJECTION
SCALE FULL
DO NOT SCALE PRINT
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±
WEIGHT .12 LBS APPROX

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING 2NT1 SERIES CHART 1
PAGE 1 OF 1
RELEASE NO. PR-19402
REPLACES -
ISSUE 11
PTC/CAD 2D
DRAWN TSM 10NOV99
CHECK AK 10NOV99
CHECK AK 12JUL04
CHECK AK 08NOV04

REVISIONS
A CO95305 TSM 10NOV99
B CO-94328 S A V 22 NOV 99
C 207607 L J B 7 MAR 03
D 207782 C S L 27 MAR 03
E 0000189 C S L 28 APR 03
F 0006540 KK 12JUL04
G 00091175 AS 08NOV04

Downloaded from Elcodis.com electronic components distributor