
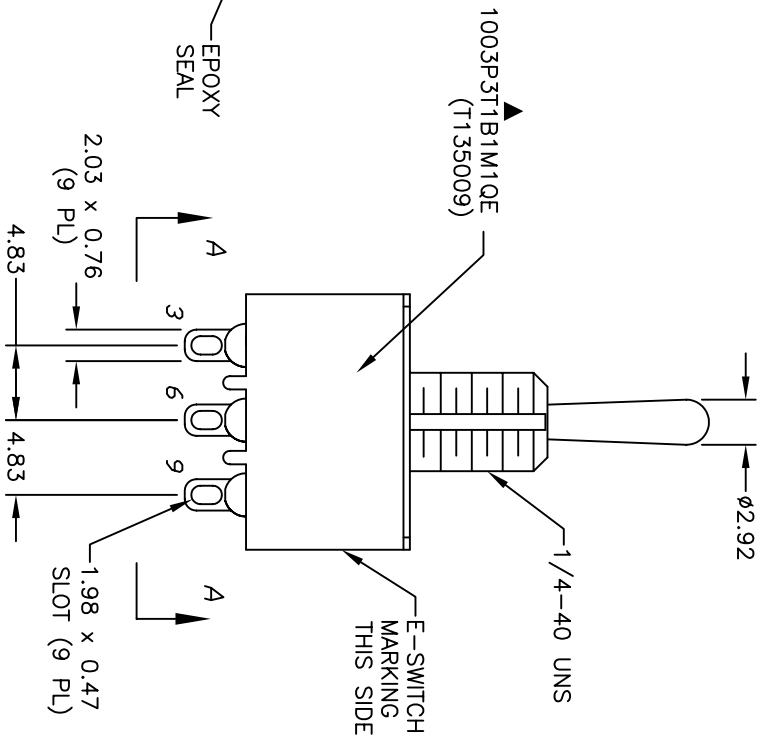


CIRCUIT: 3PDT

PDS. 1 PDS. 2 PDS. 3

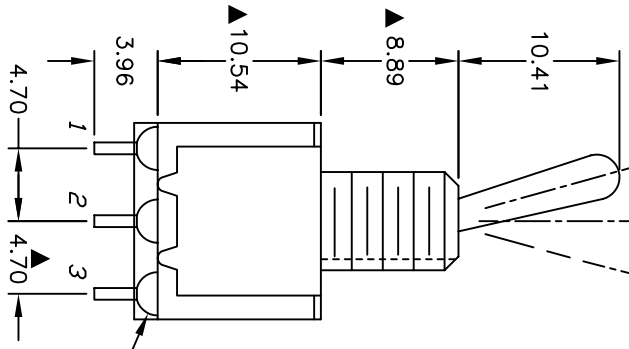

SWITCH FUNCTION			
PDS. 1	PDS. 2	PDS. 3	
DN	DN	DN	
2-3,5-6 8-9	DPEN	2-1,5-4 8-7	

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4  
0.00=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. RATING: 5 AMPS @ 120VAC OR 28VDC;  
2 AMPS @ 250VAC
5. ELECTRIC LIFE: 50,000 make-and-break cycles  
at full load.
6. INSULATION RESISTANCE: 1,000 Mega-ohm min.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. 2002/95/EC (ROHS) COMPLIANT
- ▲10. HARDWARE TO BE SHIPPED BULK  
T100011-LOCK WASHER-QTY-1  
T100015-LOCK RING-QTY-1  
T100000-HEX NUT-QTY-2
11. ▲ DENOTES MAJOR DIMENSION.



A	16974	RELEASED FOR PRODUCTION	2/7/07	TN
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
1003P3T1B1M1QEH				
SCALE	DATE	DR	DWG	REV
2:1	2/7/2007	TN	ST1355009	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED