

4



3

2

1


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
AD	00	F	LR	DATE	BY	APP
		A	REV PER EC	063C-342-01	06DEC01	MB MZ

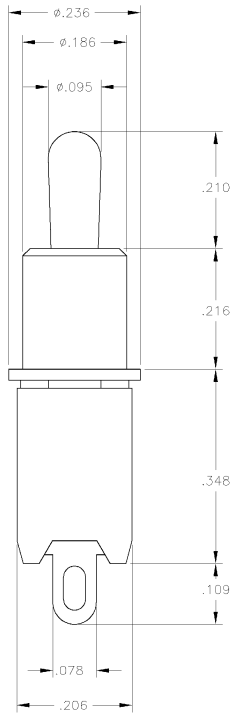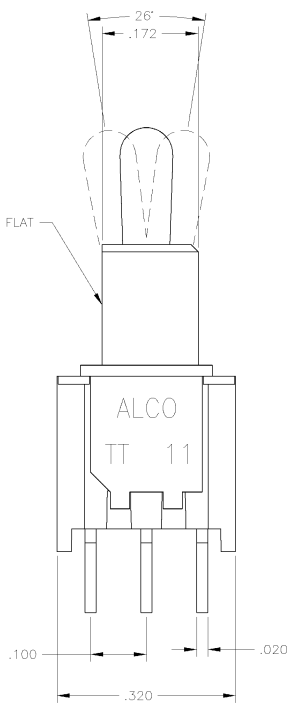

NOTES:

- MATERIALS:**
 CASE AND ACTUATOR: THERMOPLASTIC, UL94-V0.
 FRAME: STEEL, TIN PLATED
 BUSHING AND ACTUATOR LEVER: BRASS, NICKEL PLATED
 O-RING: THERMOSET ELASTOMER
 PLUNGER: STAINLESS STEEL, PASSIVATED
 SPRING: MUSICAL WIRE
 CONTACTS AND TERMINALS: BRASS, GOLD OVER NICKEL PLATED
 TERMINAL SEAL: EPOXY
- ELECTRICAL:**
 CONTACT RATING: 0.4 YA @ 20 VDC OR PEAK AC
 INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX
 INSULATION RESISTANCE: 1,000 MEGOHMS AT 500 VDC MIN.
 DIELECTRIC STRENGTH: 1,000 VOLTS RMS AT SEA LEVEL
 LIFE EXPECTANCY: 80,000 CYCLES (2 POSITION)
 60,000 CYCLES (3 POSITION).
- ENVIRONMENTAL:**
 OPERATING TEMPERATURE: -22°F TO +185°F (-30°C TO +85°C)
 STORAGE TEMPERATURE: -67°F TO +185°F (-55°C TO +85°C)



147844-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG: M. BIVNER 17002001 CHK: 2200701 M. ZITTO 2200701 M. ZITTO 2200701 NAME:	tyco Electronics Tyco Electronics Corporation City, State, Zip
DIMENSIONS: INCHES 0 P.L.C. # - 1 P.L.C. # - 2 P.L.C. # - 3 P.L.C. # - 4 P.L.C. # - ANGLES # -	DIMENSIONS: INCHES 0 P.L.C. # - 1 P.L.C. # - 2 P.L.C. # - 3 P.L.C. # - 4 P.L.C. # - ANGLES # -	PRODUCT SPEC: APPLICATION SPEC: WEIGHT:	SEE CASE CODE (DRAWING NO) A2 00779 © 147844 RESTRICTED TO:
MATERIAL: SEE TABLE	FINISH: -	CUSTOMER DRAWING	SCALE: 8:1 SHEET 1 OF 1 REV A