



RECOMMENDED P.C.B. LAYOUT



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	NONE	DN
2-3	OPEN	2-1

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X:XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC or 28VDC 2A @250VAC
5. FIXED TERMINAL/MOVING CONTACT:
Copper Alloy W/Silver plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1000V RMS @sea level
9. OPERATING TEMP.: -30°C to +85°C
10. HARDWARE TO BE SUPPLIED BULK:
T1000011-LOCK WASHER QTY-1
T1000015-LOCK RING QTY-1
T1000000-HEX NUT QTY-2
11. 2002/95/EC (ROHS) COMPLIANT

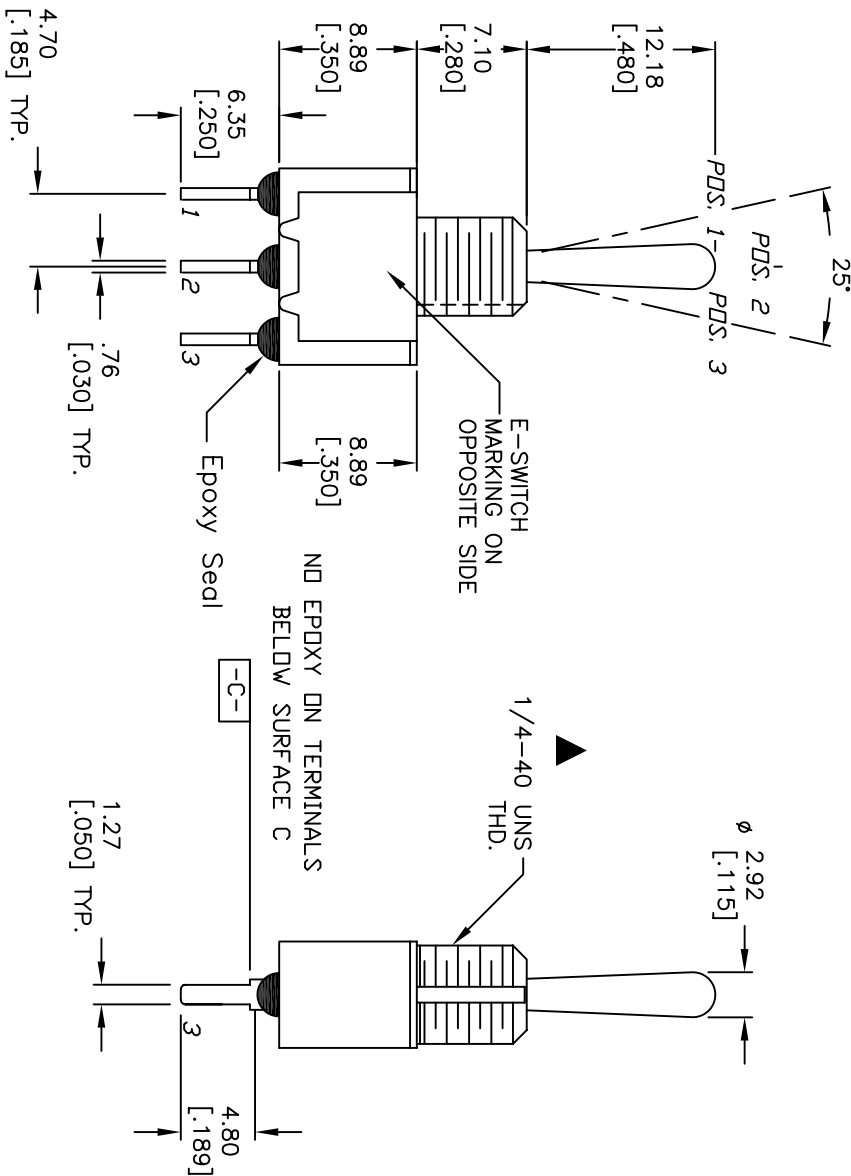

100SP11B3M2QEH

TITLE

SCALE

2:1

DATE

12/20/06

DR

TN

DWG

ST111088

REV

A

DATE

CHKD

TN

RELEASED FOR PRODUCTION

12/20/06

ECN No.

16781

DESCRIPTION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

REV

A