



SHEET OF

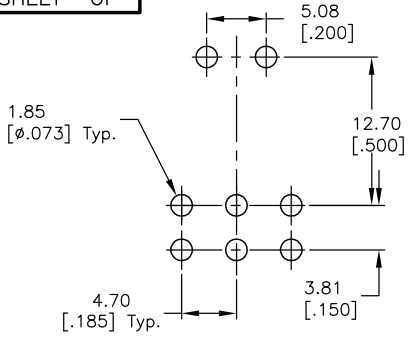

RECOMMEND P.C.B. LAYOUT





CIRCUIT: DPDT
CONTACT CONFIGURATION


SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-3, 5-6	OPEN	2-1, 5-4

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 5A @120VAC OR 28VDC:
2A @250VAC.
- ▲ 5. FIXED TERM. & MOVING CONTACT:
Copper Alloy W/SILVER plate.
6. ELECTRICAL LIFE: 50,000 make-and-break cycles
at full load.
7. INSULATION RESISTANCE: 1,000M ohm min.
8. DIELECTRIC STRENGTH: 1,000V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C.
10. ▲ DENOTES CRITICAL PARAMETER.

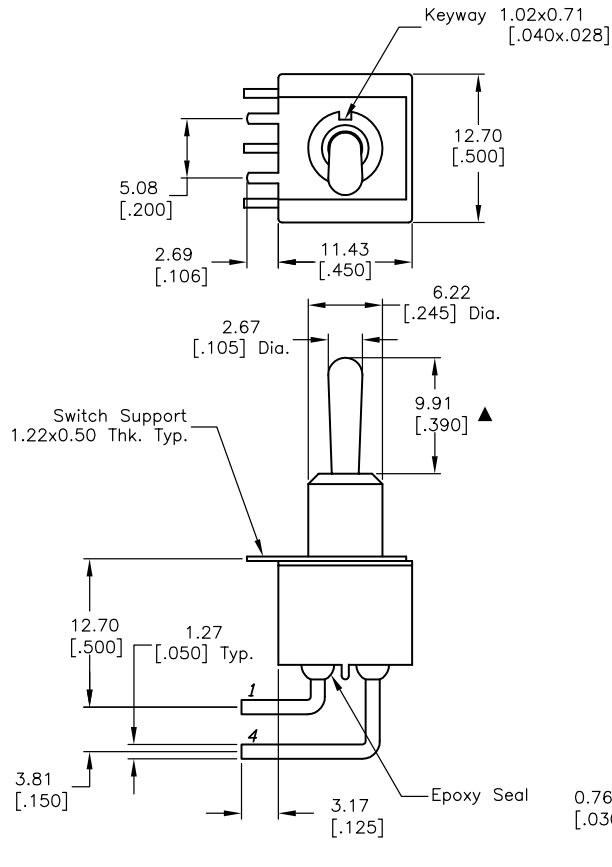

VIEW A-A

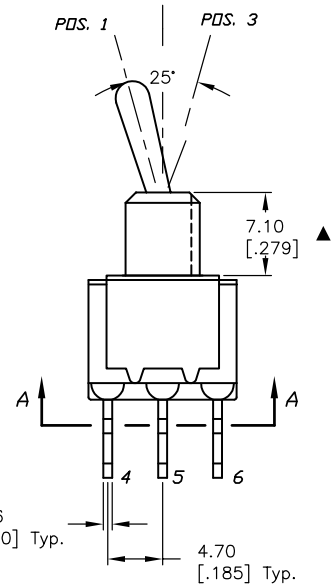

E-SWITCH®

A		13638	RELEASED FOR PRODUCTION	12/4/03	AR	TITLE					
REV.	ECN No.	DESCRIPTION			DATE	CHKD	100DP1T1B4M6QE				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED						SCALE	DATE	DR	DWG	REV	
						2:1	12/4/03	AR	T121046	A	