


CIRCUIT: SPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
DN	DIFF	DN
2-3	OPEN	2-1

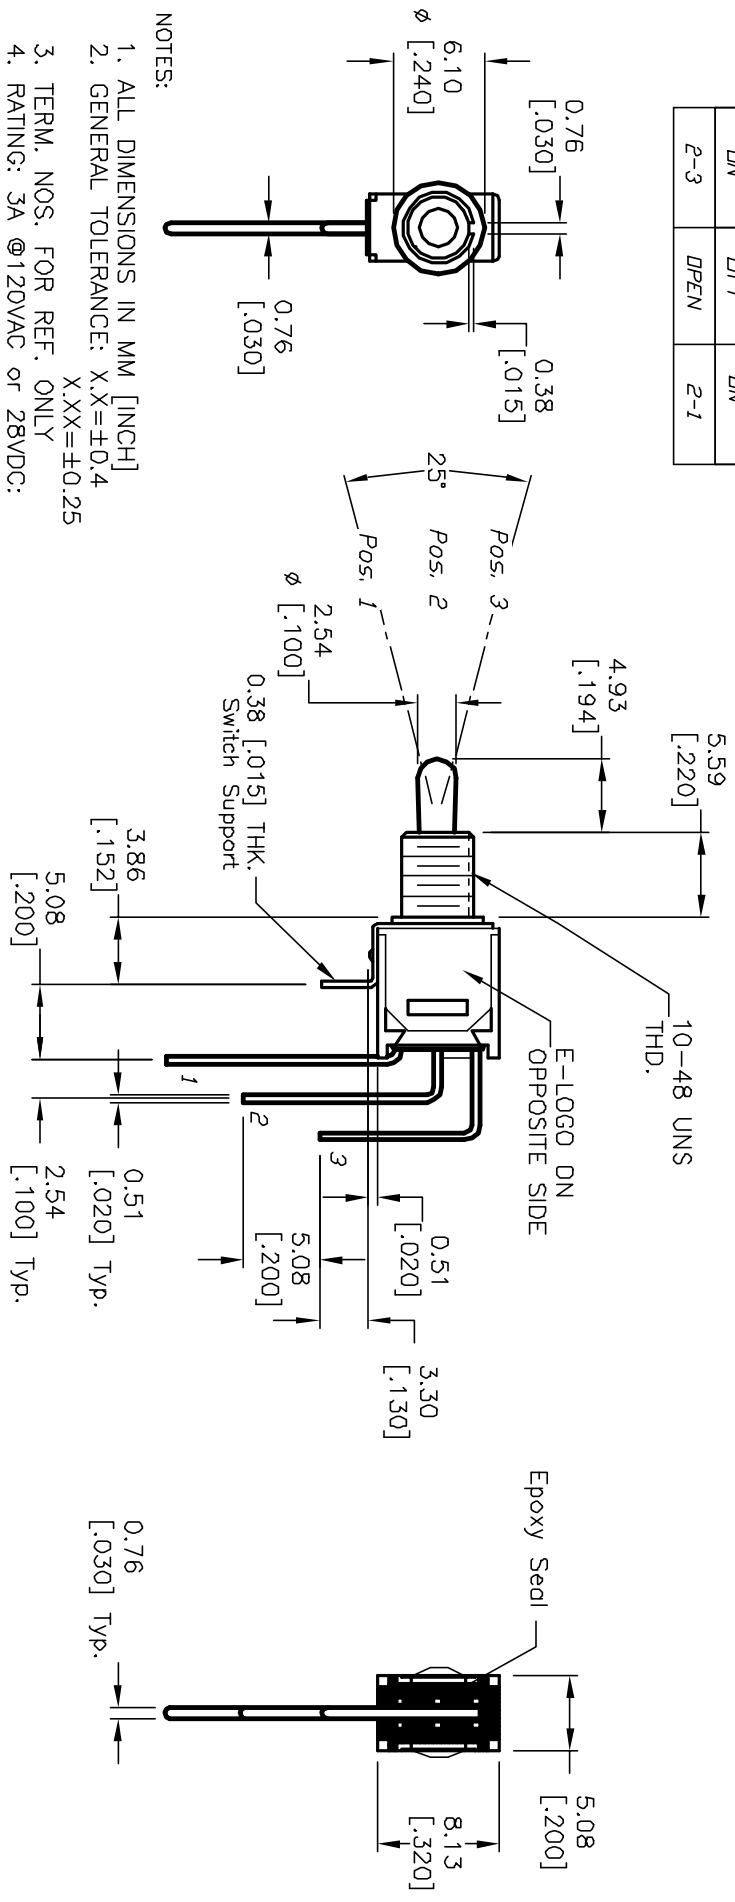

RECOMMENDED P.C.B. LAYOUT

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.XX=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 3A @120VAC or 28VDC: 1A @250VAC
 5. FIXED TERM. MOVING CONTACT: Copper Alloy w/Silver plating
 6. ELECTRICAL LIFE: 30,000 make-and-break cycle at full load.
 7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
 8. OPERATING TEMP.: -30°C to 85°C
 9. ▲ DESIGNATE MAJOR FEATURE:

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
B	12110	REVISED AND REDRAWN	5/3/02	CJB

TITLE		SCALE	DATE	DR	DWG	REV
200 MSP-3 T2 B3 M7 Q E		2:1	5/3/02	CJB	T212009	B

