
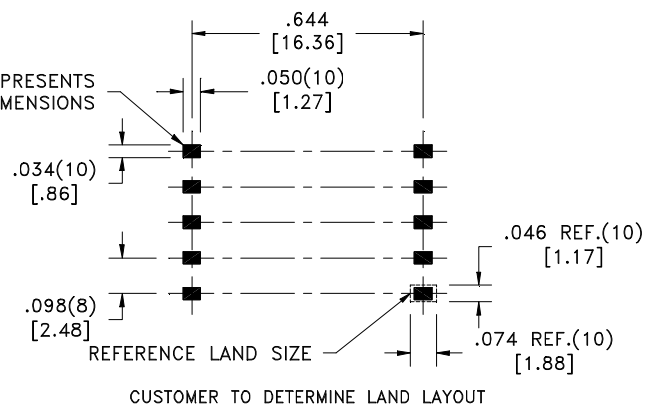
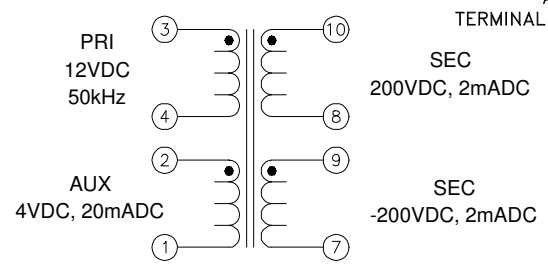
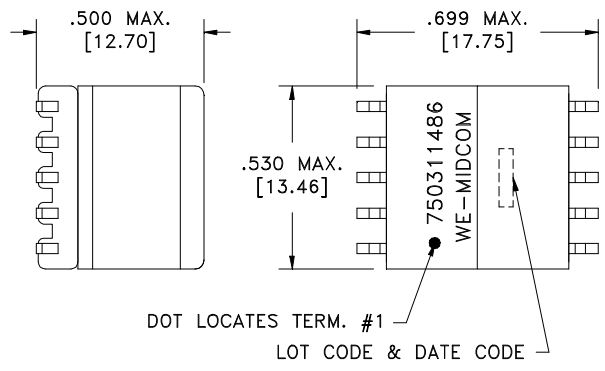


CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes



ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:

- D.C. RESISTANCE (@20°C): 3-4 , 0.220 Ohms ±10%.
2-1 , 0.180 Ohms ±10%.
10-8 , 31.00 Ohms ±10%.
9-7 , 31.00 Ohms ±10%.
- DIELECTRIC RATING: 1500VAC for 1 second between pins 3-10(tie 2+4,8+9).
- INDUCTANCE: 100µH ±10%, 50kHz, 100mVAC, 0mADC, 3-4, Ls.
- LEAKAGE INDUCTANCE: 4.5µH max., 100kHz, 100mVAC, 3-4(tie 7+8+9+10), Ls.
- URNS RATIO:
(10-8):(3-4) , (10):(1.00) , ±2%.
(9-7):(3-4) , (10):(1.00) , ±2%.
(3-4):(2-1) , (4.57):(1.00) , ±2%.
- INTERWINDING CAPACITANCE: 20pF max., 100kHz, 100mVAC, 3-10, tie(8+9), Cs.
- SATURATION CURRENT: 2ADC saturating current that causes 20% rolloff from initial inductance.

OPERATING TEMPERATURE RANGE: -40°C to +125°C including temp rise.

WE-Midcom, Inc. Watertown, SD USA Toll Free: 800-643-2661 Fax: 605-886-4486	Unless otherwise specified, tolerances are as follows: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 (.127mm)	WE-Midcom, Inc.	
	Drawing Title Transformer	Drawing Number 750311486	Rev. 02
This drawing is dual dimensioned. Dimensions in brackets are in millimeters	Revisions: See Sheet 1	Scale ----	Sheet 2 of 5
Engineer: EJK		12/18/2009	