



CUSTOMER TERMINAL	RoHS	LEAD(Pb)-FREE
Sn96%, Ag4%	Yes	Yes


more than your steps

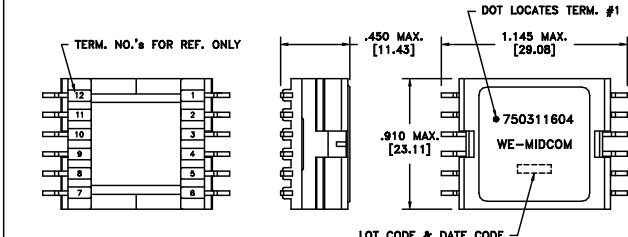

LOT CODE & DATE CODE



Application of the transformer allows for the following groups of wires to solder bridge: 1&2, 3&4, 11&12, and 8&9.

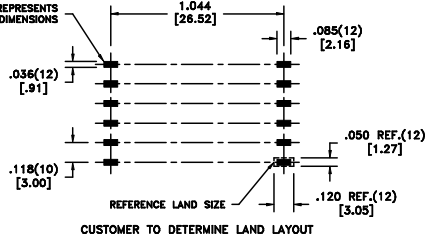

**ELECTRICAL SPECIFICATIONS @ 25°C unless otherwise noted:**

PARAMETER	TEST CONDITIONS	VALUE	
D.C. RESISTANCE	1-3	tie(1+2, 3+4), @20°C	0.030 ohms max.
D.C. RESISTANCE	8-12	tie(8+9, 11+12), @20°C	0.035 ohms max.
D.C. RESISTANCE	5-6	@20°C	0.055 ohms max.
INDUCTANCE	1-3	tie(1+2, 3+4), 10kHz, 100mVAC, Ls	8.0uH ±10%
SATURATION CURRENT		20% rolloff from initial	9.5A
LEAKAGE INDUCTANCE	1-3	tie(1+2, 3+4, 8+9+11+12), 100kHz, 10mVAC, Ls	300nH typ., 400nH max.
DIELECTRIC	1-12	1875VAC, 1 second	1500VAC, 1 minute
TURNS RATIO		(1-3):(12-9)	1:1, ±1%
TURNS RATIO		(1-3):(11-8)	1:1, ±1%
TURNS RATIO		(1-3):(5-6)	2.4:1, ±1%
TURNS RATIO		(1-3):(2-4)	1:1, ±1%

**GENERAL SPECIFICATIONS:**  
OPERATING TEMPERATURE RANGE: -40°C to +125°C.

Wire insulation & RoHS status not affected by wire color.  
Wire insulation color may vary depending on availability.

REV.	DATE	Packaging Specifications Method: <b>Tape &amp; Reel</b> PKG-0267 www.we-online.com/midcom		Tolerances unless otherwise specified: Angles: ±1° Fractions: ±1/64 Decimals: ±.005 [.13] Footprint: ±.005 [.13]	DRAWING TITLE <b>TRANSFORMER</b>	PART NO. <b>750311604</b>
6A	8/10	SEE REVISION SHEET FOR REVISION LEVEL		This drawing is dual dimensioned. Dimensions in brackets are in millimeters.	e1Sos p/n: 750311604	SPECIFICATION SHEET 1 OF 1