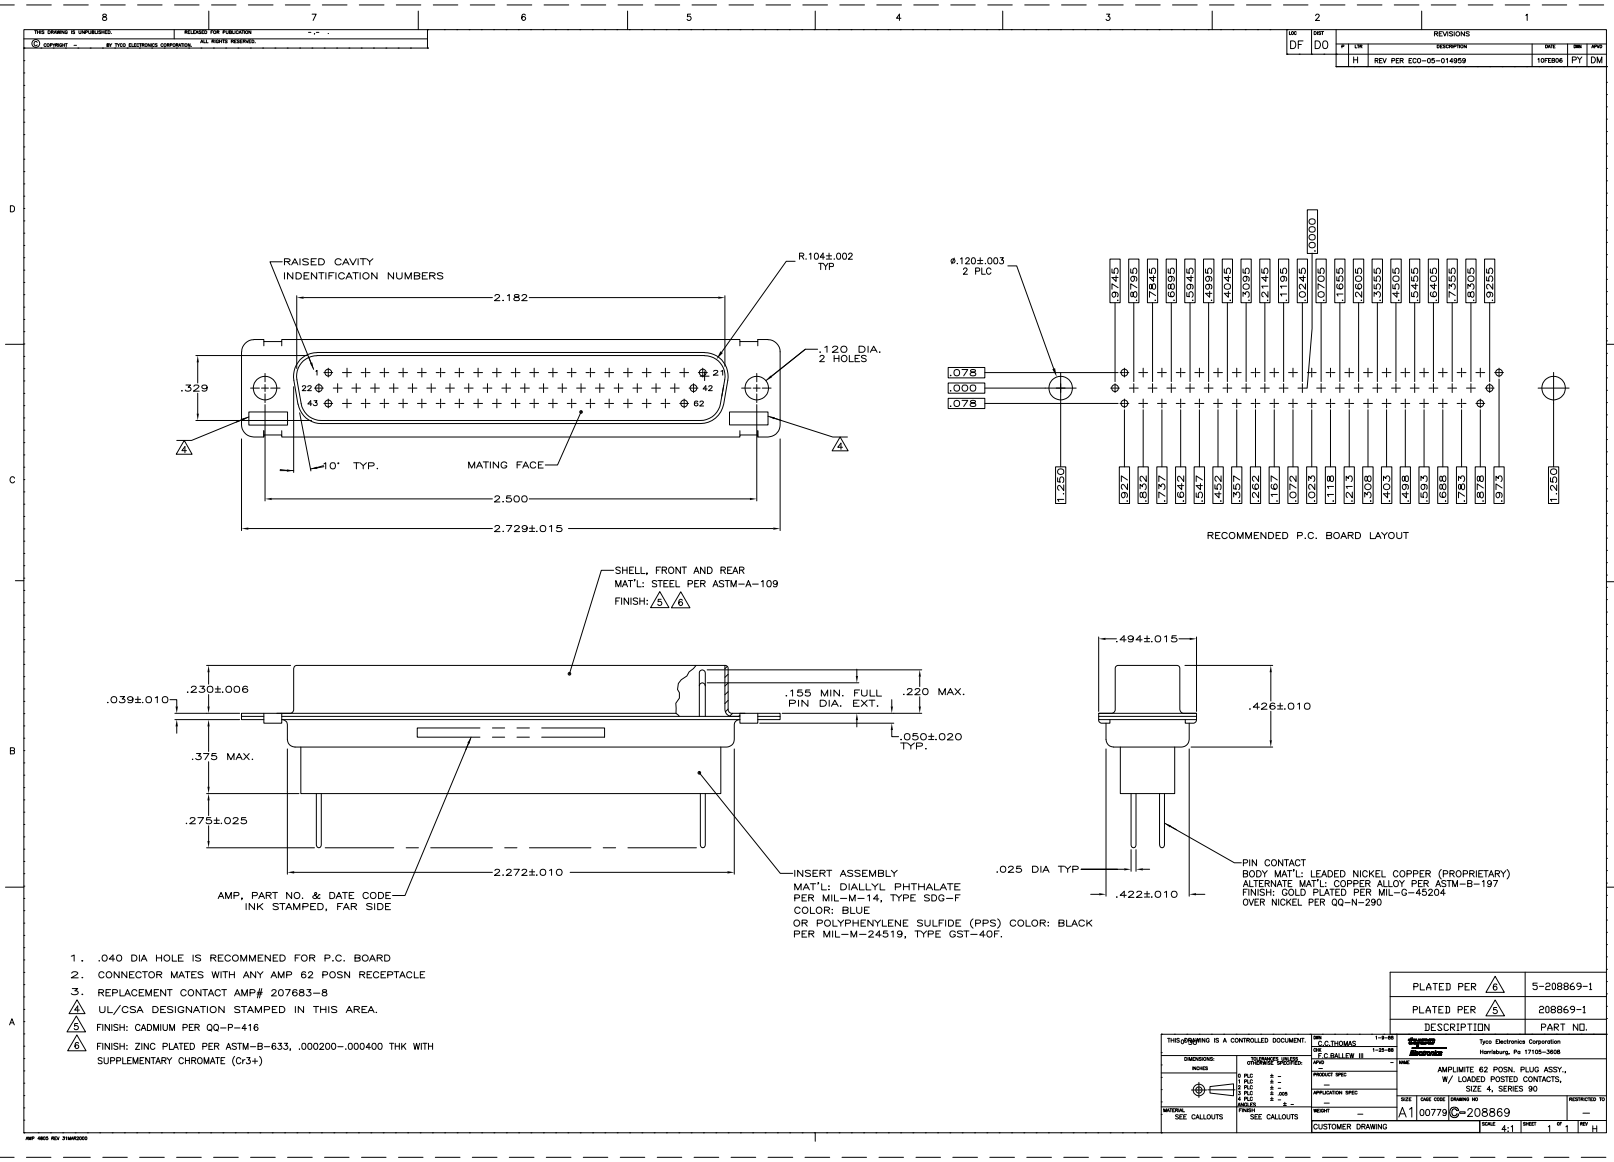

1. .040 DIA HOLE IS RECOMMENED FOR P.C. BOARD
2. CONNECTOR MATES WITH ANY AMP 62 POSN RECEPTACLE
3. REPLACEMENT CONTACT AMP# 207683-8
4. UL/CSA DESIGNATION STAMPED IN THIS AREA.
5. FINISH: CADMIUM PER QQ-P-416
6. FINISH: ZINC PLATED PER ASTM-B-633, .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+)

PLATED PER 6	5-208869-1
PLATED PER 5	208869-1
DESCRIPTION	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DRAWN: C.C.THOMAS 1-9-88
CHK: F.C.BALLEW II 1-25-88
APVD: –
PRODUCT SPEC: –
APPLICATION SPEC: –
WEIGHT: –
CUSTOMER DRAWING

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – ; 1 PLC ± – ; 2 PLC ± – ; 3 PLC ± .005 ; 4 PLC ± – ; ANGLES ± –
MATERIAL: SEE CALLOUTS
FINISH: SEE CALLOUTS

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME: AMPLIMITE 62 POSN. PLUG ASSY., W/ LOADED POSTED CONTACTS, SIZE 4, SERIES 90

SIZE: A1 | CAGE CODE: 00779 | DRAWING NO: C-208869 | RESTRICTED TO: –
SCALE: 4:1 | SHEET 1 OF 1 | REV: H

AMP 4805 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor