THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.-.-
© COPYRIGHT -. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
DF	D0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	J	REV PER ECO 05-14881	23JAN06	BL	CT

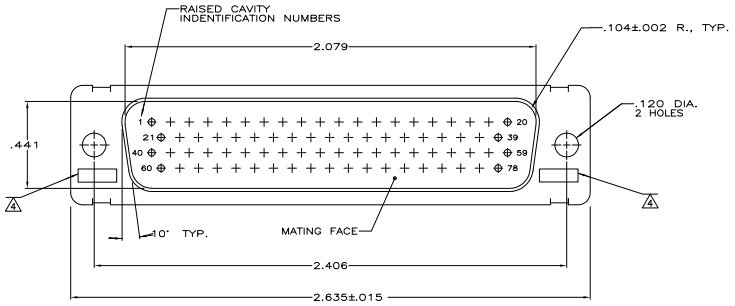

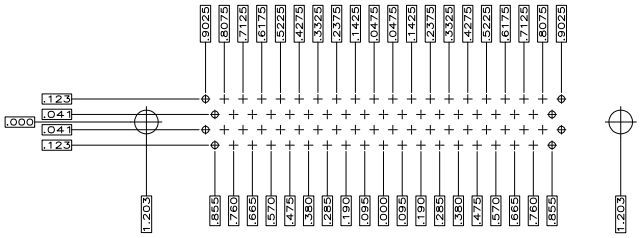

RECOMMENDED P.C. BOARD LAYOUT

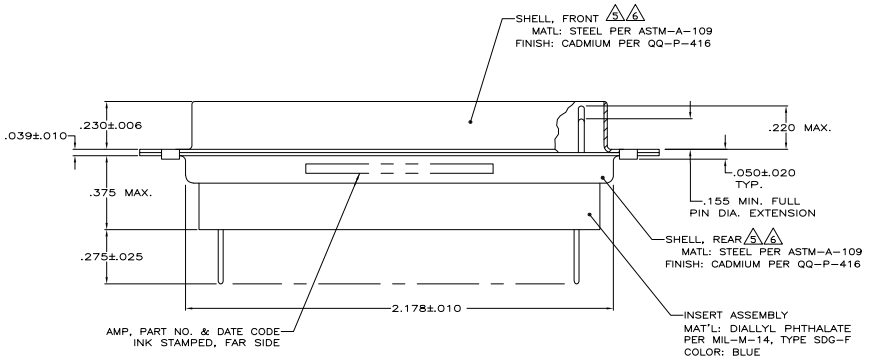

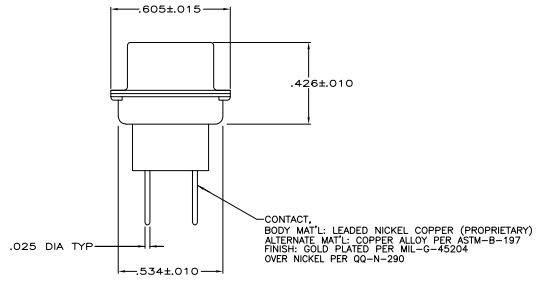

1. .040 DIA HOLE IS RECOMMENED FOR P.C. BOARD.
2. CONNECTOR MATES WITH ANY AMP 78 POSN RECEPTACLE.
3. REPLACEMENT CONTACT AMP# 207683-8.

4 UL/CSA DESIGNATION STAMPED IN THIS AREA.

5 CADIUM PER QQ-P-416.

6 FINISH: ZINC PER ASTM-B-633 .000200-.000400 THK WITH SUPPLEMENTARY CHROMATE (Cr3+).

6	5-208870-1
5	208870-1
REMARKS	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES
TOLERANCES UNLESS OTHERWISE SPECIFIED:
6 PLC ± -
5 PLC ± -
4 PLC ± .005
3 PLC ± -
ANGLES ± -
MATERIAL SEE CALLOUTS
FINISH SEE CALLOUTS

TYP	C.C.THOMAS	1-12-88
CHK	F.C.BALLEW III	1-26-88
APVD	—	
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME
AMPLIMITE 78 POSN. PLUG ASSY.,
WITH LOADED POSTED CONTACTS
SIZE 5, SERIES 90

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-208870	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV J

AMP 4805 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor