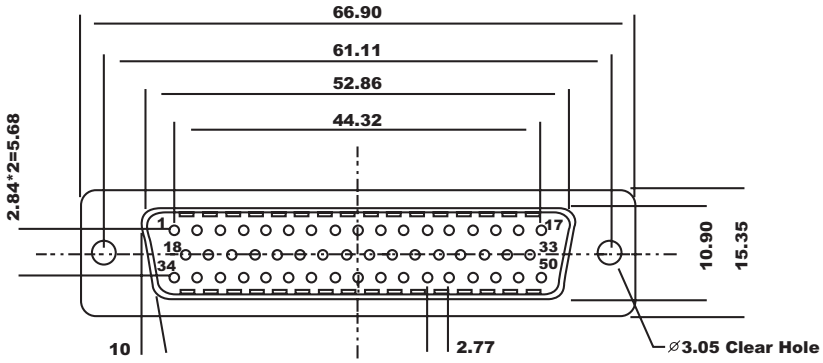

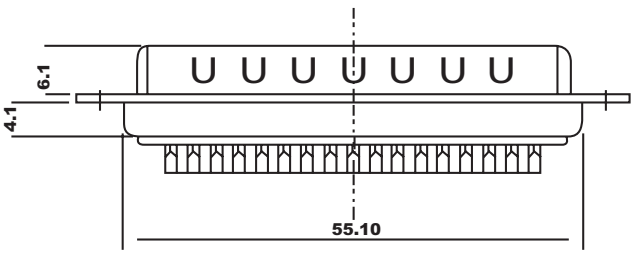



Product Specification

Material:

Insulator: Glass-Filled Thermoplastic PBT, UL94V-0 rated
Contacts: Brass or Phosphor Bronze
Shell: Steel, 100u" Tin Over 50u" min Nickel
Clinch Nut: Brass, 100u" min Nickel Plated
Boardlock: Brass, 100u" min Nickel Plated
Screwlock: Brass, 100u" min Nickel Plated

Electrical:

Contact Resistance: 20 milliohms max at 1 Amp DC.
Insulation Resistance: 1000 magohms at 500 VDC
Dielectric Withstanding Voltage: 1000 VAC/rms 60Hz for 1 minute
Current Rating: 5 Amp
Volatge Rating: 250 VAC/rms 60Hz

Description
Name: A-DS50LL-TL-B

ASSMANN Electronic Components

RoHS Compliant

THIS DRAWING IS UNPUBLISHED
© Copyright 2005 by Assmann Electronic Components All International Rights Reserved
This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.

Downloaded from Elcodis.com electronic components distributor