


Note:

- \* Waterproof Rate : IP67
- \* Connector : Black,Nylon+GF
- \* Pin: Copper Alloy,Gold Plated
- \* Applicable Wire Range: 24AWG-28AWG



Screw L=5.0 For Panel Thickness Under 1.2mm

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm

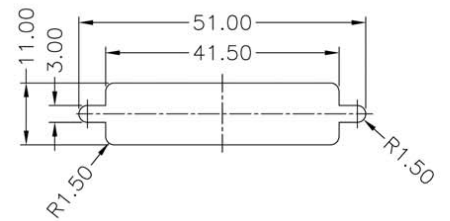

Recommended Panel Cut-Out



<p><b>ITEM NO</b> A-HDF44LL-WP</p>
<p><b>TITLE</b> D-SUB, High Density, Female, 44 pin, Solder Cup</p>

**ASSMANN**  
Electronics, Inc.

1840 W. Drake Drive, Suite 101 - Tempe, AZ 85283  
Toll Free: 1-877-277-6266 Email: info@usa-assmann.com

THIS DRAWING IS UNPUBLISHED  
© Copyright 2008 by Assmann Electronic Components  
All International Rights Reserved