
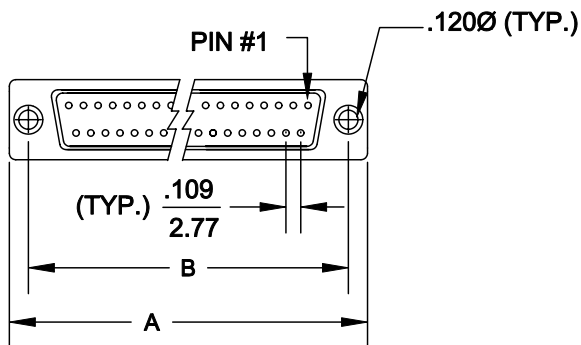


DESCRIPTION: **PLASTIC FLAT RIBBON CONNECTOR**

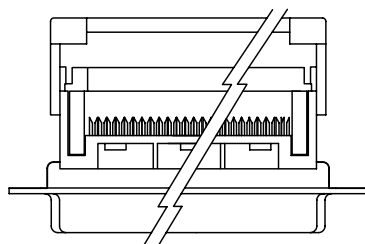

	A	B	C
9	1.213	.984	.843
	30.81	25.00	21.40
15	1.541	1.312	.843
	39.14	33.33	21.40
25	2.088	1.852	.843
	53.04	47.04	21.40
37	2.729	2.500	.843
	69.32	63.50	21.40

186-XXX-292LXX1

SERIES _____
 POSITIONS _____
 009 _____
 015 _____
 025 _____
 037 _____
 050 _____
 GENDER _____
 1 = MALE
 2 = FEMALE
 TERMINATION _____
 9 = IDC
 SHELL PLATING _____
 2 = TIN
 HARDWARE OPTIONS _____
 00 = NO HARDWARE
 55 = 4-40 INSERTS
 PLATING OPTIONS _____
 01 = GOLD FLASH

SPECIFICATIONS:

MATERIALS:

INSULATOR: UL 94V-0 RATED PBT
 +30% FIBER-GLASS OR NYLON-66
 SHELL: TIN PLATED
 CONTACTS: PHOSPHOR BRONZE
 RoHS COMPLIANT

ELECTRICALS:

CURRENT RATING: 1 AMP
 CONTACT RESISTANCE: 15 mOHMS MAX
 INSULATOR RESISTANCE: 1000 MOHMS MIN
 VOLTAGE: 500V AC FOR 1 MINUTE
 TEMPERATURE: -55°C TO +100°C

FOR USE WITH 26/28 AWG STRANDED .050 CENTER FLAT CABLE

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 9-16-05
			CHECKED:	DATE:
NorComp	SCALE: 1:1	SHEET 1	OF 1	REV 1
	DWG NO. 186-XXX-292LXX1			