

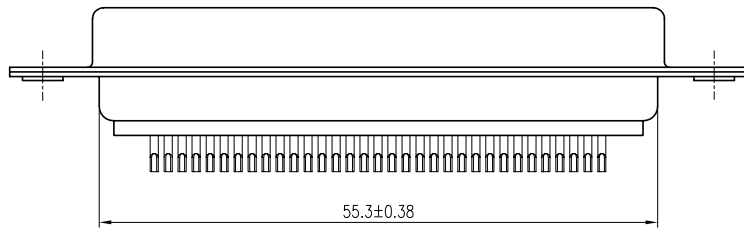


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

**CUSTOMER DRAWING**

REVISIONS				
SYM	ECN No.	DESCRIPTION	DATE	APPROVED
A		RELEASE FOR RoHS	09/09/2005	Henry Ko

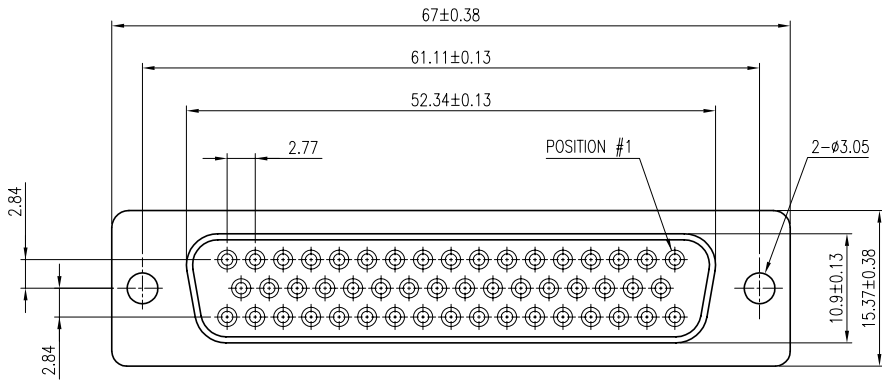

- NOTES:**
1. FRONT & REAR SHELL FINISH: SELECTIVE PLATED
  2. CONTACTS FINISH: SELECTIVE PLATED
  3. INSULATOR: PBT, GLASS FIBER FILLED, UL94 V-0, COLOR- BLACK
  4. THIS PRODUCT DOESN'T CONTAIN ENVIRONMENTAL HAZARDOUS MATERIALS PER DIRECTIVE 2002/95/EC FOR ROHS.

TOLERANCE	m/m	APPROVALS	DATE	TITLE	Amphenol®		
x.	±0.30	DRAWN		G17S SERIES D-SUB RECEPTACLE SOLDER-POT 50 POSITIONS	Amphenol Corporation		
x.x	±0.25	CHECKED			Amphenol East Asia Limited		
x.xx	±0.15	APPROVED			SCALE	N.A.	SHEET 1 OF 1
x.xxx	±0.08			SIZE	A4	REV. A	
ANGULAR	±2°			UNIT	MM		
UNLESS OTHERWISE SPECIFIED				PART NO.	G17S 500X XX0 EU	DRAWING NO.	DSUB-G17S500XXX0EU-25