THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION OCT .2000.
© COPYRIGHT 2000 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
J	

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	REVISED ECR-09-025203	04NOV10	A.Z	M.W

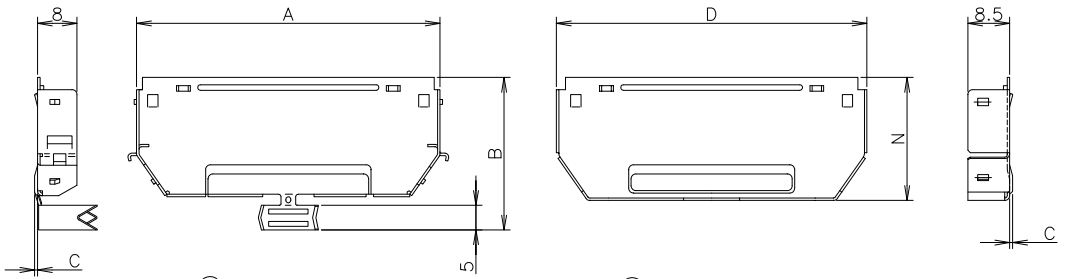

① REAR SHELL (BOTTOM) ② REAR SHELL (UPPER)

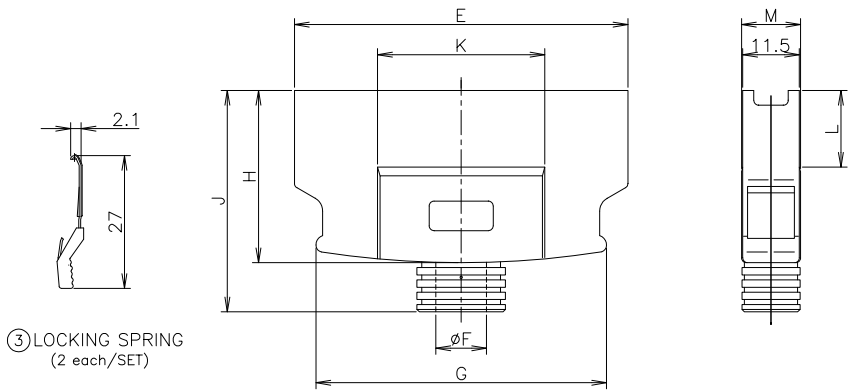

③LOCKING SPRING
(2 each/SET)

④ENCLOSURE

ITEM	MATERIAL	FINISH
①②	STEEL t=0.5	NICKEL PL. OVER COPPER PL.
③	STAINLESS STEEL THERMOPLASTIC UL94V-0	
④	G.F THERMOPLASTIC UL94V-0	COLOR:SEE ANOTHER TABLE

GENERAL TOLERANCE
10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

1- -0; AS SHOWN

POSN	A	B	C	D	E	F	G	H	J	K	L	M	N
80	61.80	31	0.6	63.10	67.75	10.3	59.05	35	45	34	15.6	11.8	25
100	74.50	33	1.3	75.80	80.45	11.2	71.75	37	47	38	12.5	13.5	27
68	54.18	28	0.6	55.48	60.13	9.8	51.43	32	42	30	14.3	12.0	22
50	42.75	28	*	44.05	48.70	8.7	40.00	32	42	13	*	11.5	22
36	33.86	28	*	35.16	39.81	8.1	31.11	32	42	13	*	11.5	22
26	27.51	28	*	28.81	33.46	7.1	24.76	32	42	13	*	11.5	22
20	23.70	28	*	25.00	29.65	6.7	20.95	32	42	13	*	11.5	22
14	19.89	28	*	21.19	25.84	6.3	17.14	32	42	13	*	11.5	22

RECOMMENDED CABLE DIA	COLOR	POSN	P/NO.
8.5~10.2		80	3-176793-0
9.9~11.0		100	2- -9
8.1~9.6		68	2- -8
7.2~8.5		50	2- -7
6.4~7.9		36	2- -5
5.9~6.9		26	2- -4
5.4~6.5		20	2- -2
OBSOLETE	BLACK	14	2-176793-1
8.5~10.2		80	1-176793-0
9.9~11.0		100	-9
8.1~9.6		68	-8
7.2~8.5		50	-7
6.4~7.9		36	-5
5.9~6.9		26	-4
5.4~6.5		20	-2
4.3~6.1	BEIGE WHITE	14	176793-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

MATERIAL: SEE TABLE
FINISH: SEE TABLE

DWN	T.KAWAMAE	10OCT00
CHK	H.MURAMATSU	11OCT00
APVD	H.MURAMATSU	11OCT00
PRODUCT SPEC	108-5288	
APPLICATION SPEC	114-5166	
WEIGHT		

Tyco Electronics
Tyco Electronics AMP K.K.
Kawasaki, Japan

NAME
SHIELD CASE KIT
WITHOUT LOGO
CHAMP.050 SERIES II STD-TYPE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-176793	

CUSTOMER DRAWING

SCALE	SHEET	REV
1:1	1 OF 1	F

AMP 1470-19 REV 31MAR2000

Downloaded from Elcodis.com electronic components distributor