
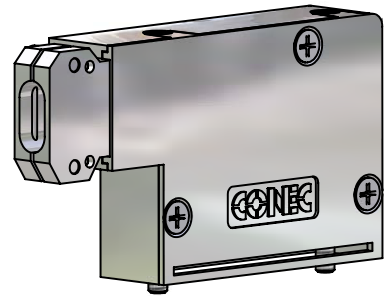


- NOTES:**
- HOOD: ZINC DIE CAST; NICKEL PLATED
 - CABLE STRAIN RELIEF: ZINC DIE CAST; NICKEL PLATED
 - PLASTIC SPACERS TO PREVENT MISALIGNMENT OF HIGH POWER CONTACTS:
PBT GF UL 94 V-0; BLACK
 - JACKSCREW: STEEL; NICKEL PLATED; SLOTTED
 - FIXING SCREW: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1
 - SCREW FOR CABLE STRAIN RELIEF: ZINC PLATED; CROSS RECESSED; TYPE H, SIZE 1

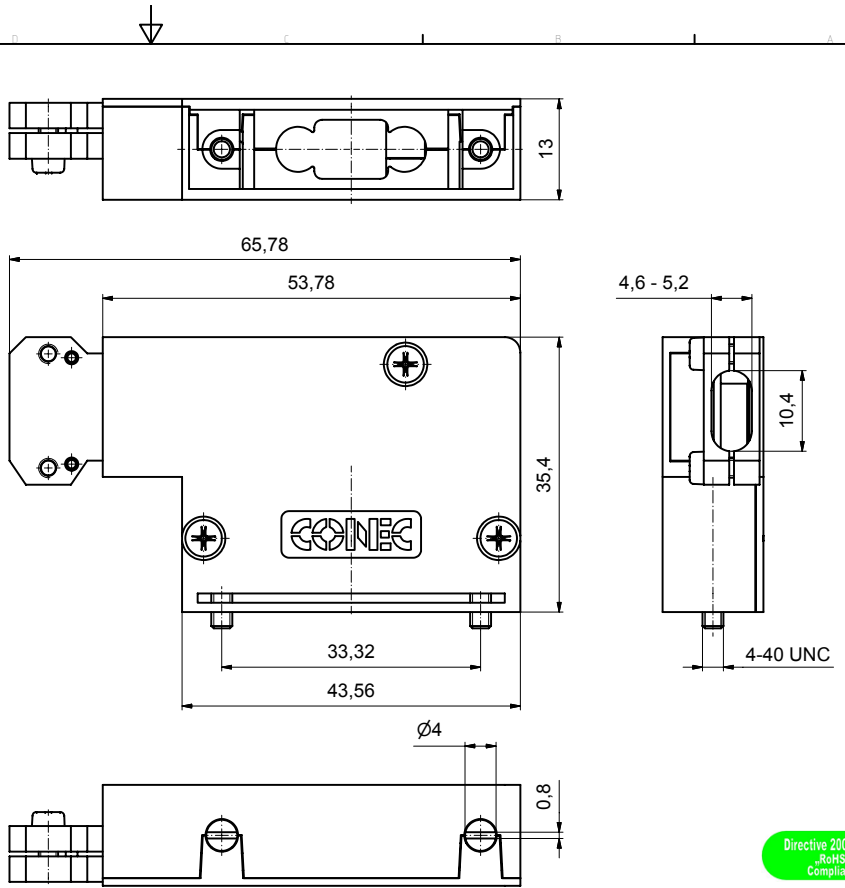

Directive 2002/95/EC
RoHS
Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY MANNER WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

tolerance		dim. in mm	
date	name		
drawn 20.09.07	Schmidt		
appd. 20.09.07	Koch		
norm			
d-old	SK0726T1		
a	Origin		
rev.	description	date	name



scale:	2:1	
material:	see notes	
title:	Hood µTCA for use with 7W2 connector side cable exit	
dwg no:	Inventor 10	DIN-A3
	16K1A2148	sh: 1
part no:	16-000010	