


4 3 2 1

THIS DRAWING IS UNCLASSIFIED
 (C) COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	CHK	APPD
G	7-03	REV PER 063D-0520-00	CT	DM	

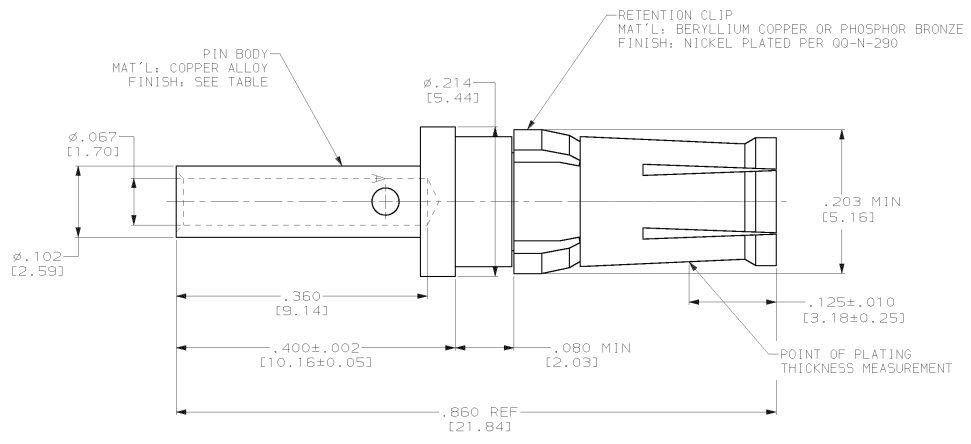

- THIS PART CONFORMS TO REQUIREMENTS FOR DANIELS CRIMP TOOL NO. FT8, WITH DANIELS POSITIONER PART NO. TP731, STRIP LENGTH .375, #16 AWG SETTING 8, #18 AWG SETTING 6.
- MATES WITH 212013-1 IN AMPLIMITE CONNECTOR ASSEMBLIES ONLY.
- FINISH: PLATED GOLD .000050 [0.00127] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER 00-N-290.
- FINISH: PLATED GOLD .000030 [0.00076] MIN THK PER MIL-G-45204 OVER NICKEL .000050 [0.00127] MIN THK PER 00-N-290.
- WIRE BARREL WILL ACCEPT #16-#18 AWG WIRE.

PRELIMINARY NOT RELEASED FOR PRODUCTION

212014-2	212014-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT

DESIGNED BY D. MILLER 11/10/00	DATE 11/10/00
CHECKED BY D. MILLER 11/10/00	DATE 11/10/00
PRODUCT SPEC 108-10045	APPLICATION SPEC 114-10014
WEIGHT -	SCALE 10:1

AMP AMP Incorporated
 Harrisburg, PA 17105-3608

ASSEMBLY, SOCKET CONTACT
 POWER VIII, #16 & #18 AWG

DATE CASE CODE DRAWING NO
 A200779 C-212014

RESTRICTED TO
 CUSTOMER DRAWINGS

SCALE 10:1 SHEET 1 OF 1 REV 6

AMP 1471-9 REV 11/04/07
 25-JUL-03 12:41:05 us016412 /hose/us016412/docred