



(d)  
 INNER CONDUCTOR: SOLDERED  
 OUTER CONDUCTOR: CRIMPED  
 HANDCRIMP TOOL: 360X10519X  
 TOOL INSERT: 360X11019X  
 INSERT CAVITY B: HEX 3.25/128

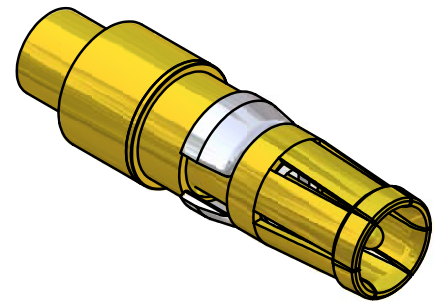

STRIPPING DIMENSIONS (d)

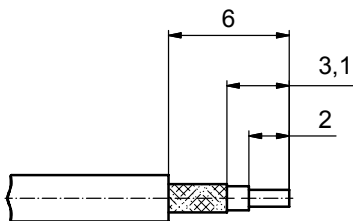

Directive 2002/95/EC  
 „RoHS“  
 Compliant

5	1	RETAINING RING	COPPER ALLOY	NICKEL PLATED
4	1	FERRULE	COPPER ALLOY	GOLD over NICKEL
3	1	BODY	COPPER ALLOY	GOLD over NICKEL
2	1	DIELECTRIC	PTFE	-
1	1	CENTER CONTACT	COPPER ALLOY	GOLD over NICKEL
item	quantity	part description	material	plating

partlist

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL  
 CUSTOMER APPROVAL DATE:  
 NAME: TITLE:  
 COMPANY NAME:  
 APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND

10 x d	Ä 2925	12.02.08	HS	norm	date	name
1 x c	Ä 2535	18.07.06	Lehmen	d-old	29.10.99	Mickenbecker
"b"	Ä 1077	30.11.99	Mick.		02.11.99	Barcinski
a	Origin					
rev.	description	date	name			

tolerance ISO 2768-m  
 dim. in mm  
 scale: 10.1  
 material: see partlist

title: (c) COAXIAL CONTACT SOCKET 75 OHM  
 inner conductor for solder termination  
 outer conductor for crimp termination  
 dwg no: Inventor 10 (d)  
 13K2IU7B  
 part no: 132J30019X  
 DIN-A3 sh: 1

