

4




3

2


1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	QST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	MIN	APD
		H		REVISED PER ECO-08-019103	19AUG2008	ZMRC	WJR

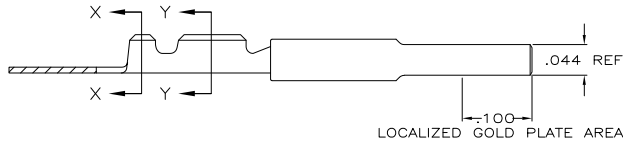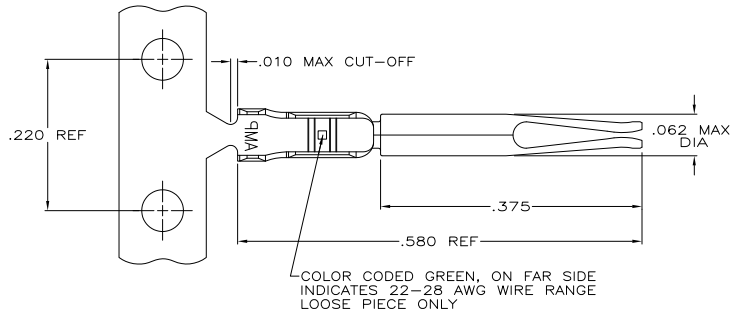

SECTION X-X  
INSULATION BARREL



SECTION Y-Y  
WIRE BARREL

- ⚠ FOR MINI APPLICATOR.
- ⚠ FOR HAND TOOL USE ONLY.
- 3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- ⚠ GOLD PLATING PER MIL-G-45204, NICKEL PLATING PER QQ-N-290, TIN PLATING PER MIL-T-10727.
- ⚠ PLATED WITH .000030 GOLD IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000050 NICKEL.
- ⚠ PLATED WITH GOLD FLASH IN LOCALIZED GOLD PLATE AREA, TIN PLATED WIRE BARRELS, OVER .000030 NICKEL.
- ⚠ PLATED WITH .000050 GOLD ON INSIDE OF LOCALIZED GOLD PLATE AREA, .000050 GOLD ON REMAINDER, ALL OVER .000050 NICKEL UNDERPLATE.
- ⚠ GOLD PLATING ON THE CARRIER STRIP IS NOT REQUIRED.
- ⚠ OBSOLETE.

SMALL PACK	⚠	⚠	748610-7	⚠	1-748610-1
-	⚠	⚠	748610-9	⚠	748610-8
STANDARD	⚠	⚠	748610-7	⚠	748610-5
-	⚠	⚠	748610-4	⚠	748610-2
PACKAGING	FINISH	⚠	LOOSE PIECE	⚠	PART NUMBER

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVED:		TYCO ELECTRONICS CORPORATION	
INCHES		0 PLC	±	DR C. RICHARD	1-12-88	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		1 PLC	±	GR W. LENKER	1-14-88		
		2 PLC	±	APPD V. CUMAR	1-19-88		
		3 PLC	± .005	PRODUCT SPEC			
		4 PLC	±	APPLICATION SPEC			
		ANGLES	± 0° 30'	WEIGHT		SIZE	CAGE CODE
MATERIAL	PHOS BRONZE PER QQ-B-750	FINISH	SEE TABLE			A2	00779
				CUSTOMER DRAWING		DRAWING NO	C=748610
						RESTRICTED TO	
						SCALE	10:1
						SHEET	1 of 1
						REV	H

AMP 1471-9 REV 31MAR2000

748610

B

A