


used for: D-SUB

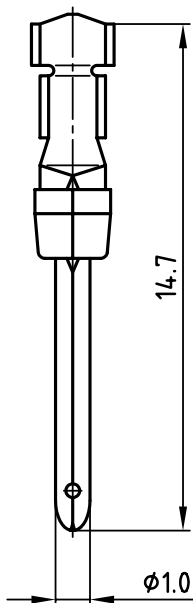

NOTES:

Material stamped Contacts: phosphor bronze
 Finish: min. 8 μ " hard-gold-plated in the contact area
 Temperature range: -55°C to +125°C
 Rated current: 7.5A
 Test voltage: 1000V eff. at 50Hz
 Contact resistance: $\leq 10\text{m}\Omega$
 Insulation resistance: $\geq 5000\text{M}\Omega$

Directive 2002/95/EC
 „RoHS“
 Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

tolerance			
2002	date	name	
drawn	11.01.	Parei	
appd.	11.01.	Resonnek	
norm			
d-old			
rev.	description	date	name

scale:	5:1	
material:	SEE NOTES	
title:	PLUG CONTACT CRIMP AWG24-20	
dwg no:	AutoCAD 2000	DIN-A
	16K2A430A	4
		sh: 1/1
part no:	161A13399X	