

4


3

2

1



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		0		RELEASED PER EC OS13-0234-05	08SEP05	BM	JG
		01		REVISED PER ECO-10-000444	16JAN10	KK	AEQ

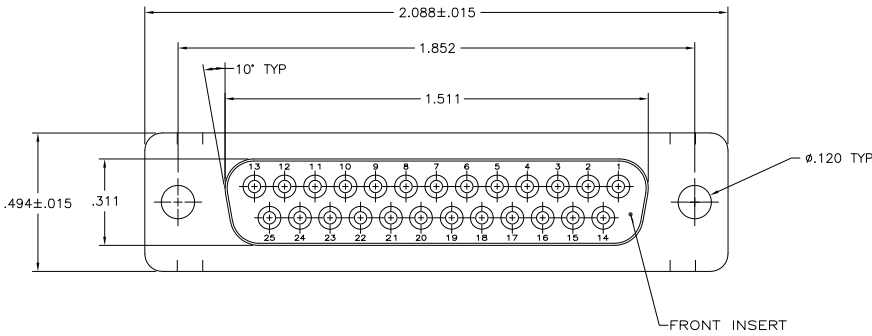

- CONNECTOR ACCEPTS SIZE 20 DF SOCKET CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
- CONNECTOR COMPLIES WITH AMP SPEC. 108-40005 WHERE APPLICABLE.

- 3 MATERIAL:
 INSERTS: FLAME RETARDANT 94V-0 RATED GLASS FILLED NYLON,
 COLOR: BLACK.
 SHELLS: STEEL.
- 4 FINISH:
 SHELLS: ZINC PLATED .000200-.000400 THICK, YELLOW CHROMATE COATING.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

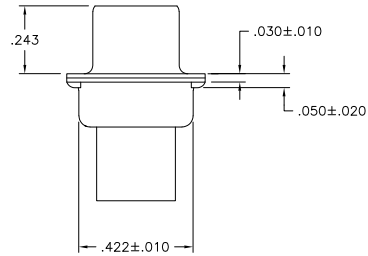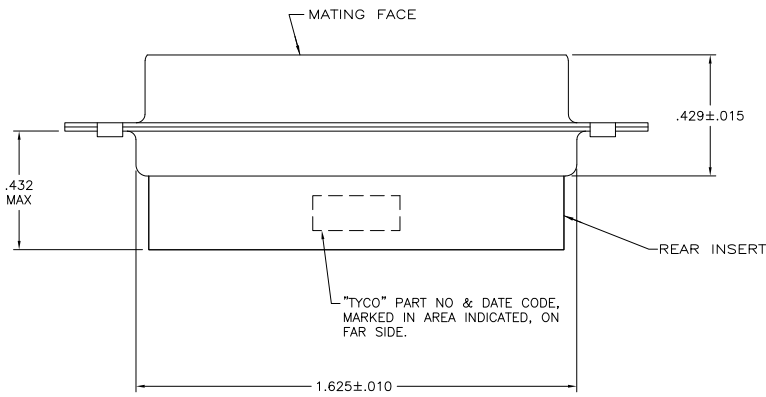

**COPYRIGHT 2005
 TYCO ELECTRONICS CORP
 ALL RIGHTS RESERVED**

OBSOLETE	SMALL PACK	5205207-4
	STANDARD	5205207-1
	PACKAGING TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: S. MCMASTER	ORSEPOS	Tyco Electronics Corporation	
DIMENSIONS: INCHES		CHK: R. RHODE	ORSEPOS	Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APP: M. WALMSLEY	ORSEPOS	RECEPTACLE CONNECTOR, SIZE 3, 25 POS., AMPLIMITE HDP	
0 PLC ± .005		PRODUCT SPEC	ORSEPOS	SIZE	CAGE CODE
1 PLC ± .005		APPLICATION SPEC	ORSEPOS	A2	00779
2 PLC ± .005		WEIGHT	ORSEPOS	C=	5205207
3 PLC ± .005		RESTRICTED TO	ORSEPOS	CUSTOMER DRAWING	SCALE
4 PLC ± .005		DATE	ORSEPOS	NTS	SHEET
ANGLES ± .5°		REV	ORSEPOS	1	OF 1
MATERIAL	FINISH		ORSEPOS	REV	01

5205207

A