

4


3

2



1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIBT		REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE	MIN	APD
		A		REVISED PER ECO-11-002006	11APR2011		CJV/CWR

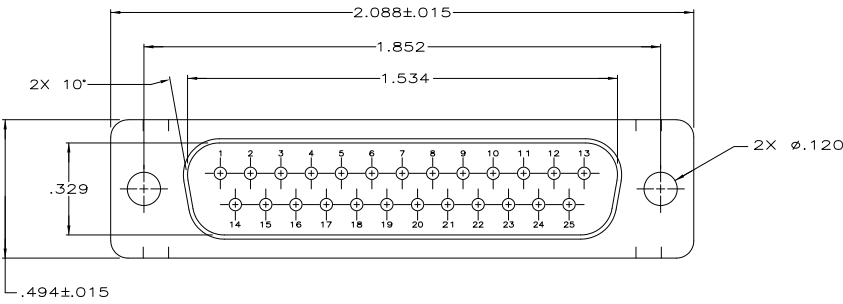

- CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
 - CONNECTOR COMPLIES WITH AMP SPEC. 108-40005 WHERE APPLICABLE.
- 3 MATERIAL:
 MOLDED PARTS: FLAME RETARDENT 94V-0 RATED GLASS FILLED NYLON, COLOR: BLACK.
 SHELLS: STEEL.
- 4 FINISH:
 SHELLS: ZINC PLATED .000200-.000400 THICK, YELLOW CHROMATE COATING.

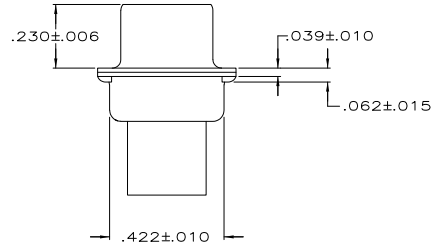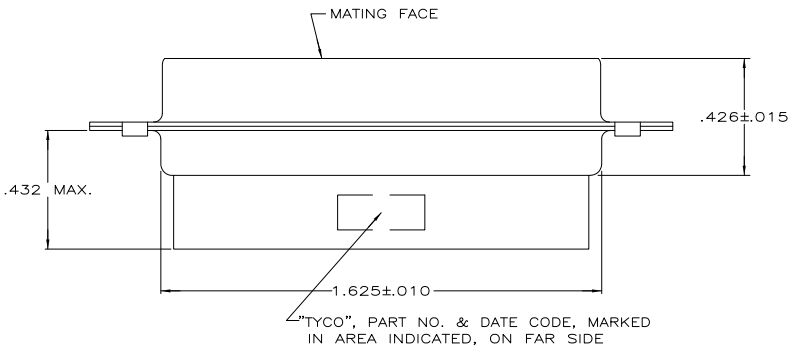

**COPYRIGHT 2005
 TYCO ELECTRONICS CORP
 ALL RIGHTS RESERVED**

STANDARD	5205208-1
PACKAGING TYPE	PART NUMBER

TE TE Connectivity

THIS DRAWING IS A CONTROLLED DOCUMENT.		DR. S. MCMASTER	ORSEPOS
DIMENSIONS:		OK. R. OHIDE	ORSEPOS
INCHES		C. M. WALSLEY	ORSEPOS
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPC. M. WALSLEY	ORSEPOS
0 PLC	± .005	PRODUCT SPEC.	NAME
1 PLC	± .005	APPLICATION SPEC.	SIZE
2 PLC	± .005	WEIGHT	CAGE CODE
3 PLC	± .005	CUSTOMER DRAWING	DRAWING NO.
4 PLC	± .005		RESTRICTED TO
ANGLES	± .1°		
MATERIAL	3		
FINISH	4		
		SCALE	NTS
		SHEET	1 of 1
		REV	A