

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN	APVD	
M		ECR-09-004273	02-03-09	AEG	KMA	
M1		ECR-09-011073	01JUN10	RK	KMA	
M2		ECR-10-020025	13JAN11	RK	KMA	

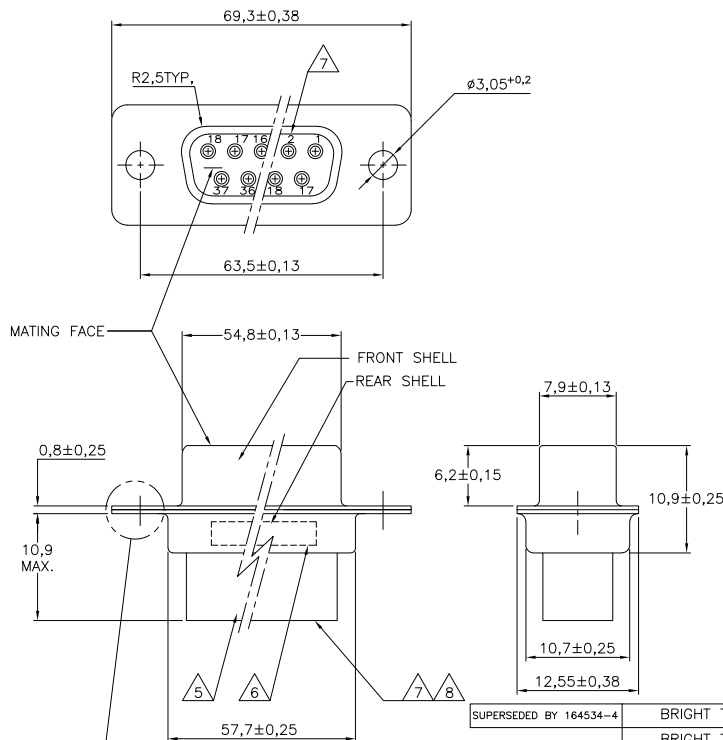

## NOTES:

- 1 THIS RECEPTACLE ACCEPTS SIZE 20 REC. CONTACTS.
  - 2 MAXIMUM WIRE INSULATION RECOMMENDED FOR USE WITH THIS RECEPTACLE IS 1,73 DIA. MAX..
  - 3 RETENTION TINES ARE AN INTEGRAL PART OF INSERT.
  - 4 FOLLOWING INSERTION/REMOVAL TOOLS ARE RECOMMENDED FOR USE WITH THESE CONNECTORS:  
 32-28AWG/28-24AWG CONTACTS  
 91067-3 INSERTION/REMOVAL  
 726363-1 INSERTION ONLY  
 24-20AWG CONTACTS  
 726363-1 INSERTION ONLY  
 726364-1 REMOVAL ONLY
- △ INSERTS: GLASSFILLED SELF-EXTINGUISHING PBT, COLOR BLACK.  
 △ TE, PARTNUMBER AND DATE CODE; INK STAMPED.  
 △ RAISED CAVITY IDENTIFICATION 0,8 HIGH.  
 △ RAISED CAVITY IDENTIFICATION NUMBERS ON WIRE SIDE ARE WHITENED FOR 164534-9.

SUPERSEDED BY 164534-4	BRIGHT TIN	BRIGHT TIN	STEEL	164534-9	△
	BRIGHT TIN	BRIGHT TIN	STEEL	164534-4	
	PLATING FRONT SHELL	PLATING REAR SHELL	MATERIAL SHELLS	PARTNUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.KESSLER	11FEB99	Tyco Electronics Corporation 's-Hertogenbosch, Nederland	
DIMENSIONS: mm		CHK W.SOOMERS	APVD W.SOOMERS	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC			
0 PLC ± -		APPLICATION SPEC			
1 PLC ± 0,2		WEIGHT			
2 PLC ± -		SIZE			
3 PLC ± -		CAGE CODE			
4 PLC ± -		DRAWING NO			
ANGLES ± 2°		RESTRICTED TO			
MATERIAL		FINISH		SCALE	
				NTS	
				SHEET 1 OF 1	
				REV M2	

AMP 1470-19 REV 31MAR2000