THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -.- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
GP	00

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	B1	REVISED PER ECO-11-004835	11MAR11	RK	HMR

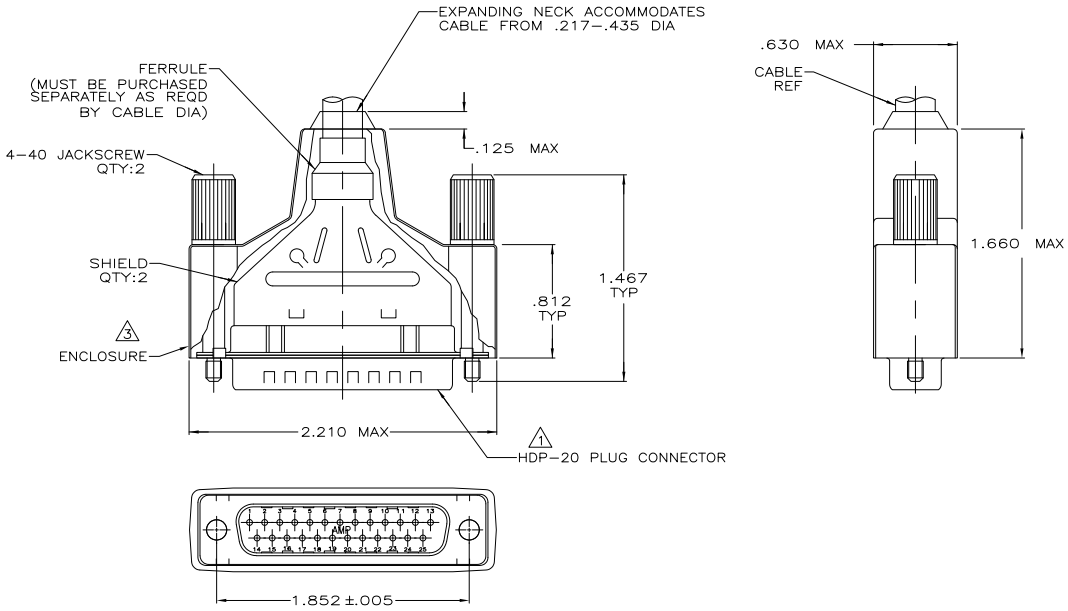

1. PLUG ACCEPTS SIZE 20 DF PIN CONTACTS. CONTACTS MUST BE PURCHASED SEPARATELY.
2. ALL PARTS SHIPPED UNASSEMBLED.
3. FLAME RETARDANT 94V-0 RATED, STYRENE POLYOLEFIN OR PVC, BLACK.
4. INSERT - FLAME RETARDANT 94V-0 RATED GLASS FILLED, NYLON OR POLYESTER, BLACK.
5. SHELLS & SHIELDS - STEEL PER ASTM A109.
6. SHELLS & SHIELDS - .000200 MIN TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.
7. COMPONENTS INDIVIDUALLY BULK PACKED.
8. ZINC ALLOY.
9. ZINC PHOSPHATE COATING, BLACK.

7	W/LOGOS	9	8	1658659-1
PACKAGING	REMARKS	FINISH	MATERIAL	PART NUMBER
		4-40 JACKSCREWS		

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± .020
4 PLC ± -
ANGLES ± -

MATERIAL SEE TABLE 4 5
FINISH SEE TABLE 6

DWN	J.REITZEL	31JUL03
CHK	S.BOLASH	31JUL03
APVD	M.WALMSLEY	31JUL03
PRODUCT SPEC	108-40030	
APPLICATION SPEC	114-40030	
WEIGHT	-	

TE Connectivity

NAME: BULK KIT, PLUG, SHIELDING ENCLOSURE, SIZE 3, 25 POSN, AMPLIMITE HDP-20

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-1658659	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV B1

1658659

1471-9 (3/11)

Downloaded from Elcodis.com electronic components distributor