

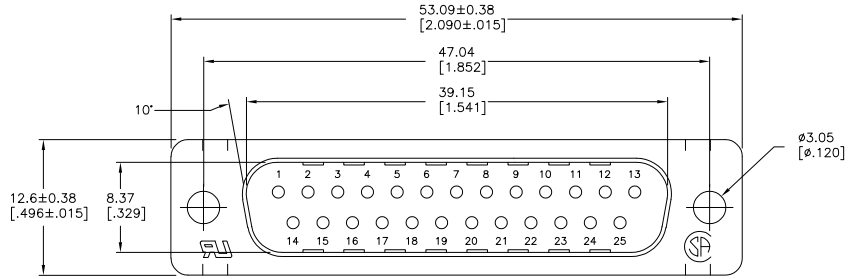


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT 2008 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LIC		DST		REVISIONS			
TP	LR	DESCRIPTION	DATE	DRN	APPD		
A		RELEASED PER PPR 100-05	27MAR06	JG	CR		

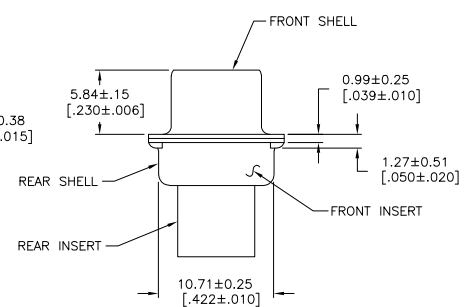

- △ INSERTS: FLAME RETARDANT GLASS FILLED NYLON, UL94V-0 RATED, COLOR BLACK. SHELLS: CARBON STEEL.
- △ SHELLS: 0.00254[.000100] MIN TIN OVER 0.00051[.000020] MIN NICKEL OVER 0.00254[.000100] MIN COPPER.
- 3. CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS. RETENTION TINES ARE AN INTEGRAL PART OF INSERT.

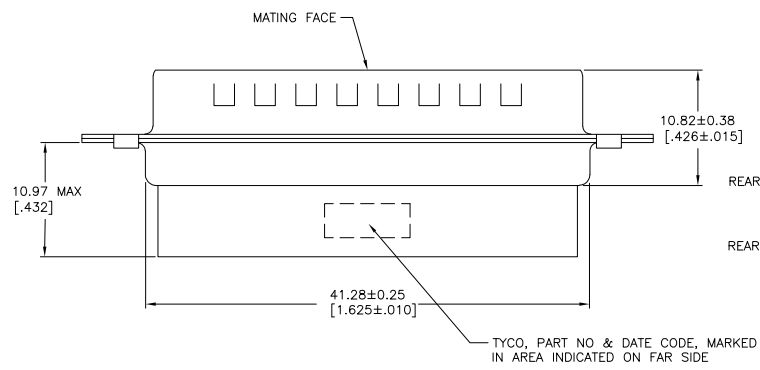

1888307-1  
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DN G. GERACE	28MAR08	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
DIMENSIONS: mm(INCHES)		DRN C. RHOIDE	27MAR06	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD M. WALMSLEY	27MAR06	PLUG CONNECTOR, SIZE 3, 25 POS, AMPLIMITE HDP
Ø P L C ± .01 P L C ± .01 P L C ± 0.1(.005) P L C ± .2	FINISH △	PRODUCT SPEC 108-40005 APPLICATION SPEC 114-40030	SIZE A2	CASE CODE 00779
MATERIAL △		WEIGHT -	DRAWING NO 1888307	RESTRICTED TO -
		CUSTOMER DRAWING	SCALE 4:1	SHEET 1 OF 1 REV A

AMP 1471-B REV 31MMR2000

1888307