

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION. ALL RIGHTS RESERVED.


LOC		DIBT		REVISIONS			
GP	00	P	LTR	DESCRIPTION	DATE	BY	APPD
		B1		REVISED PER ECO-11-004835	11MAR11	RK	HMR

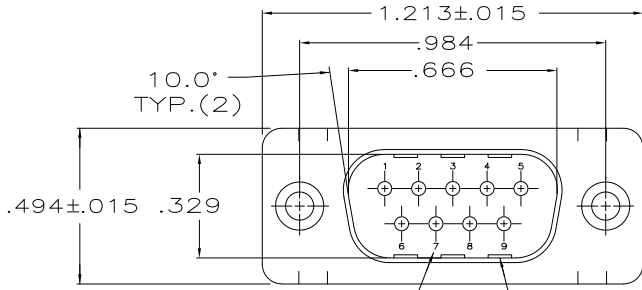

RAISED CAVITY IDENTIFICATION

GROUNDING INDENTS (SEE TABLE)

MATING FACE

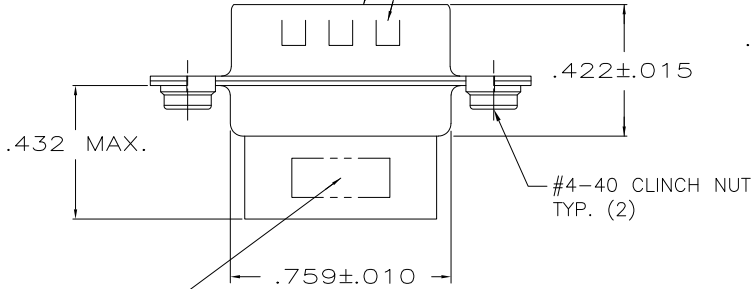


MANUFACTURER'S LOGO, PART NO. & DATE CODE, MARKED IN AREA INDICATED, ON FAR SIDE

1. CONNECTOR ACCEPTS SIZE 20 DF PIN CONTACTS, RETENTION TINES ARE AN INTEGRAL PART OF INSERT.

MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC; COLOR: BLACK.

SHELLS: STEEL PER ASTM A109.

.000200 MIN TIN PLATE OVER .000100 MIN COPPER UNDERPLATE.

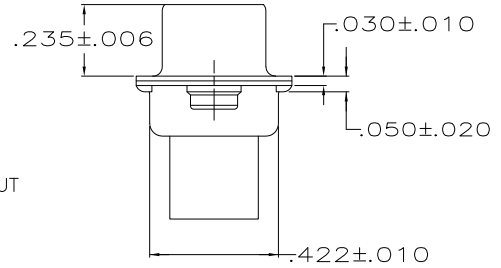

NO	1658642-2
YES	1658642-1
GROUNDING INDENTS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		BY: VARELA - DOCKES 11-17-04	TE Connectivity
DIMENSIONS: INCHES		CHK: GERACE 11-17-04	APD: M. WALMSLEY 11-17-04
MATERIAL:		PRODUCT SPEC: 108-40005	NAME: PLUG CONNECTOR, SIZE 1, 9 POS., W/ CLINCH NUTS, AMPLIMITE HDP
FINISH:		APPLICATION SPEC: 114-40030	SIZE: A2
SHELLS:		HEIGHT: -	CAGE CODE: 00779
		RESTRICTED TO: -	DRAWING NO: C=1658642
		CUSTOMER DRAWING	SCALE: 4:1 SHEET: 1 of 1 REV: B1

1471-9 (3/11)

1658642

A