
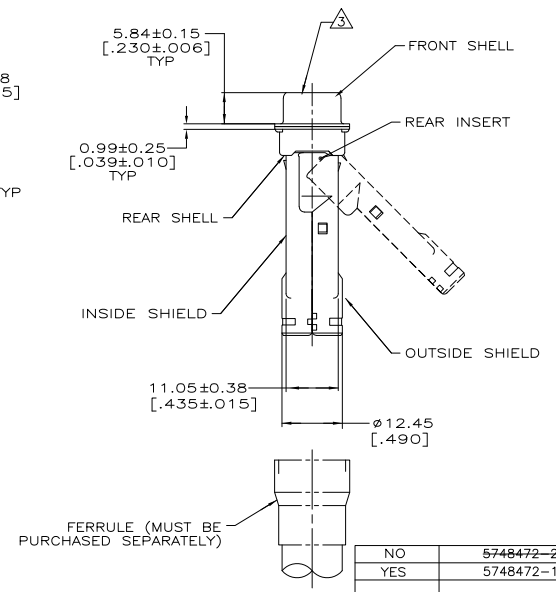


THIS DRAWING IS UNPUBLISHED.  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

REV	DATE	DESCRIPTION	BY	APPD
0	12-21-04	RELEASED PER EC OS13-0257-04	LV	JG
01	10NOV09	REVISED PER ECO-09-024927	KK	AEG

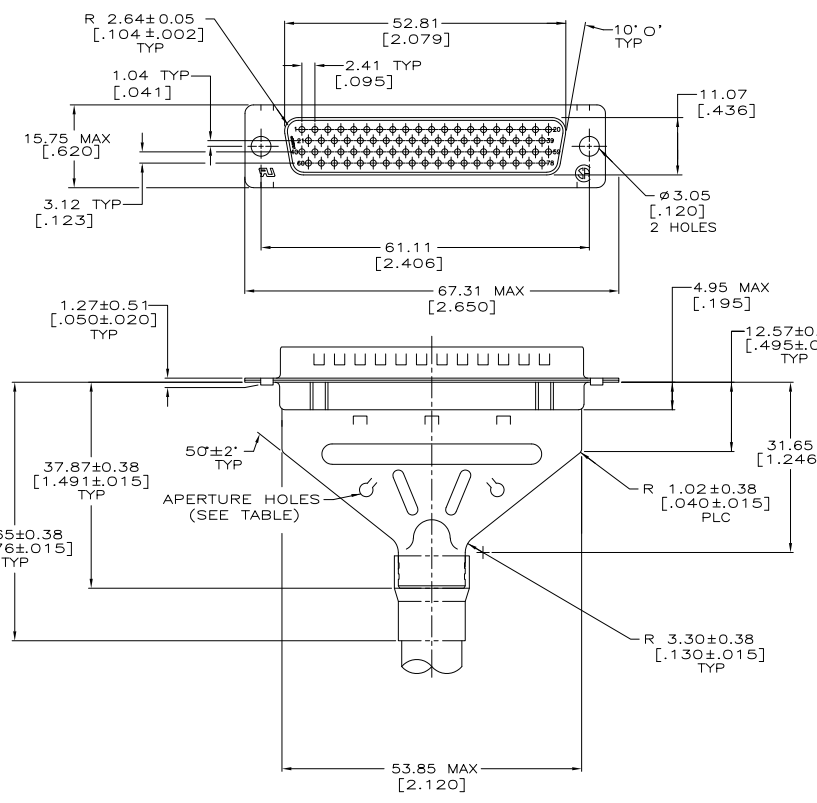

- ▲ INSERTS: NYLON, BLACK, UL 94V-0 RATED. SHELLS & SHIELDS: CARBON STEEL PER ASTM A109.
- ▲ SHELLS & SHIELDS: 5.08µm [.000200] MIN TIN OVER 2.54µm [.000100] MIN COPPER.
- ▲ PLUG ACCEPTS SIZE 22 PIN CONTACTS. (CONTACTS MUST BE PURCHASED SEPARATELY).
- ▲ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

THIS DRAWING IS A CONTROLLED DOCUMENT.		DW: VARELA - 12-31-04 DW: GERACE - 12-31-04 DW: M. WALMSLEY - 12-21-04	Tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608
DIMENSIONS: mm [inches] TOLERANCES UNLESS OTHERWISE SPECIFIED: Ø PLC ± . - 1 PLC ± . - 2 PLC ± 0.13 [005] 3 PLC ± . - 4 PLC ± . - ANGLES ± 0° 30'	PRODUCT SPEC: 108-126B APPLICATION SPEC: 114-10001 WEIGHT: -	SIZE: A2 CASE CODE: 00779 DRAWING NO: ©=5748472	PLUG KIT, UNASSEMBLED, SHIELDING HARDWARE, SIZE 5, 78 POSN, HDP-22, AMPLIMITE RESTRICTED TO: - SCALE: 2:1 SHEET: 1 of 1 REV: 01
NO APERTURE HOLES		PART NUMBER: 5748472-2 ▲	