THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - N/A -
© COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

UCC	DIST
DF	D0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	S	REV PER ECO-08-030008	21JAN2009	PK	RL

1. THIS RCPT. IS DESIGNED TO CONFORM TO THE LATEST ISSUE OF MIL-C-24308.
2. MAX WIRE INSUL TO BE USED WITH THIS RCPT. IS ø.054.
3. METAL RETENTION CLIPS ARE INCLUDED IN INSERTS.
4. PACKAGE STAMPED M 24308/2-287F.
5. THIS RCPT. WILL ACCEPT SIZE 22 SOCKET CONTACT M 39029/57-354 OR ANY TYCO HDD-22 SOCKET CONTACT.
6. MFG'S PART NO. STAMPED ON CONNECTOR REPRESENTS KIT NUMBER WITH CONTACTS.
7. UL/CSA DESIGNATION STAMPED ON SHELL.
8. 204514 INK STAMPED, NEAR SIDE. M24308/2-12F INK STAMPED, FAR SIDE.
9. 204502-4 INK STAMPED, NEAR SIDE.
10. FINISH: BRIGHT TIN PER ASTM-B-545, .000400-.000550 THK OVER COPPER PER AMS2418, .000050 MIN THK.

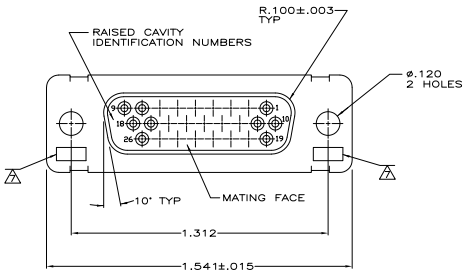

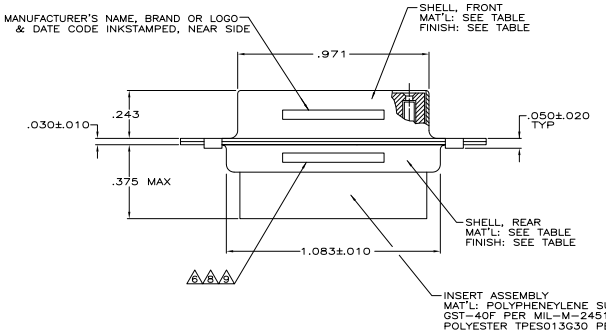



	5	11	STEEL, CLASS G	204502-4
SUPSD BY 204502-1	-	CADMIUM PER QQ-P-416	STEEL, CLASS G	204502-3
SUPSD BY 206501-4	-	CADMIUM PER QQ-P-416	BRASS	204502-2
	4,6,8	CADMIUM PER QQ-P-416	STEEL, CLASS G	204502-1
	REMARKS	FINISH	SHELL MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
3 PLC ± -
2 PLC ± -
1 PLC ± .xx
4 PLC ± .005
ANGLES ± 0.5°

MATERIAL: SEE TABLE
FINISH: SEE TABLE

TEM	C.C.THOMAS	01-DEC-07
CE		23-JAN-08
APVD	F.C.BALLEW	23-JAN-08
PRODUCT SPEC	—	
APPLICATION SPEC	—	
WEIGHT	—	

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME: AMPLIMITE RCPT. FOR SOCKET CONTACTS
HI-DENSITY D CONNECTOR
SIZE 2 (26 POSN) SERIES 90

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A1	00779	C-204502	—

CUSTOMER DRAWING | SCALE 4:1 | SHEET 1 OF 1 | REV S

AMP 4805 REV 31MAR2000

05FEB2009 us016412 H:\docmod\204502_1_c.dwg

Downloaded from Elcodis.com electronic components distributor