


PROJ	DATE	REV	DESCRIPTION	DATE	BY	APP
5068	07	DO				
		E	REVISED PER ECO-10-025541	24DEC10	SK	RL

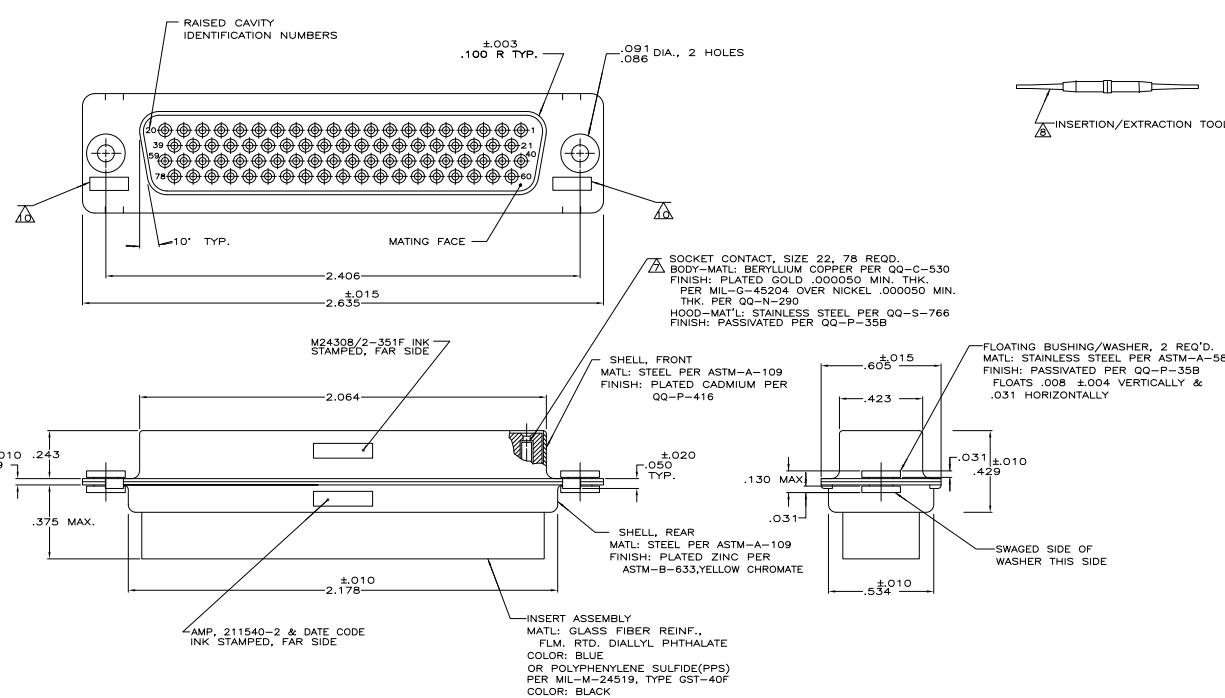

1. THIS RECEPTACLE WILL MATE WITH ANY 78 POSN., SIZE 5 PLUG IN AMPLIMITE SERIES.
 2. MAXIMUM WIRE INSULATION TO BE USED WITH THIS RECEPTACLE IS .054 DIA.
 3. SST RETENTION CLIPS ARE INCLUDED IN INSERTS.
- △ PACKAGE STAMPED M24308/2-491F & AMP P/N 211540-1
 - △ PACKAGE STAMPED M24308/2-351F & AMP P/N 211540-2
 - △ PACKAGE STAMPED M24308/2-362F & AMP P/N 211540-3
 - △ AMP P/N 204351-1; MIL P/N 57-354, INCLUDED IN KIT
 - △ AMP P/N 91067-1; MIL P/N M81969/1-04
 - △ CONNECTOR SUPPLIED WITHOUT CONTACTS; SHOWN FOR ILLUSTRATION ONLY.
 - △ UL/CSA DESIGNATION STAMPED IN THIS AREA, OPTIONAL

SUPSD BY 204544-2 & 91067-1	SAME AS -1 EXCEPT: △ △ △	211540-3
	SAME AS -1 EXCEPT: △ △ △	211540-2
	AS SHOWN	211540-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DATE: 11-18-88	REV: 1	REVISED BY: TYS ELECTRONICS CORPORATION
DESIGNED BY: [Signature]	DESIGNED BY: [Signature]	DATE: 11-18-88	REV: 1	REVISED BY: TYS ELECTRONICS CORPORATION
DATE: 11-18-88	REV: 1	REVISED BY: TYS ELECTRONICS CORPORATION	DATE: 11-18-88	REV: 1
DATE: 11-18-88	REV: 1	REVISED BY: TYS ELECTRONICS CORPORATION	DATE: 11-18-88	REV: 1
DATE: 11-18-88	REV: 1	REVISED BY: TYS ELECTRONICS CORPORATION	DATE: 11-18-88	REV: 1